






455W 
 Higher power generation better LCOE

 n-type with very lower LID

 Better Temperature Coefficient

 Better low irradiance response

 25-year product warranty

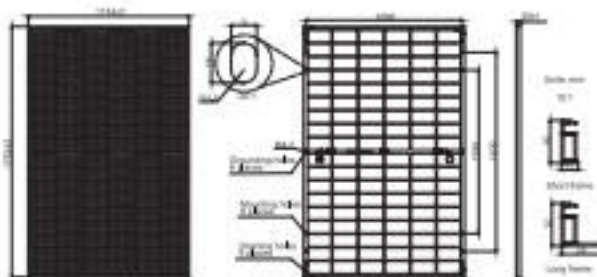
 30-year linear power output warranty

n-type Bifacial Double Glass High Efficiency Mono Module JAM54D40 LB

430-455

Comprehensive Certificates

- IEC 61215, IEC 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- ISO 45001: 2018 Occupational health and safety management systems
- IEC 62941: 2019 Terrestrial photovoltaic (PV) modules Quality system for PV module manufacturing

**455W****430-455**
JAM54D40**LB**
Series

Remark: maximum frame color and cable length available upon request

Cell	Mono-18BB
Weight	22kg
Dimensions	1762*2mm*1134*2mm*30*1mm
Cable Cross Section Size	4mm ² (IEC), 12 AWG (UL)
No. of cells	100(6*18)
Junction Box	IP68, 3 diodes
Connector	QC 4.10-351/ MC4-EVO2A
Cable Length (Including Connector)	Portrait: 300mm(+)/500mm(-) 800mm(+)/800mm(-) (Leapfrog) Landscape: 1200mm(+)/1200mm(-)
Front Glass/Back Glass	1.6mm/1.6mm
Packaging Configuration	36pcs/Pallet, 936pcs/40HQ Container