

BLOCK B UPVC WINDOW PROPOSAL



Features

Maximum sash sizes
Top hung: 1400mm (w) x 1400mm (h)
Side hung: 800mm (w) x 1550mm (h)
Fixed light: 3000mm (w) x 3000mm (h)

Outer frames
56mm, 72mm and 84mm outer frames

Mullions
70mm or 95mm mullions

Sash
76mm casement sash

Finishes
Available in a large assortment of colours and woodgrain options from the Variations range


Glazing beads
24mm sculptured
28mm sculptured
32mm sculptured
36mm bevelled
40mm bevelled

Ancillaries
Frame extensions, cills and weathering trims
Range of coupling options
Range of bay pole options

Thermal performance*
Achieves U-values as low as 1.2 W/m²K using double glazing
Achieves U-values as low as 0.80 W/m²K using triple glazing


* Figures can vary dependent on specification.

Technical Drawing

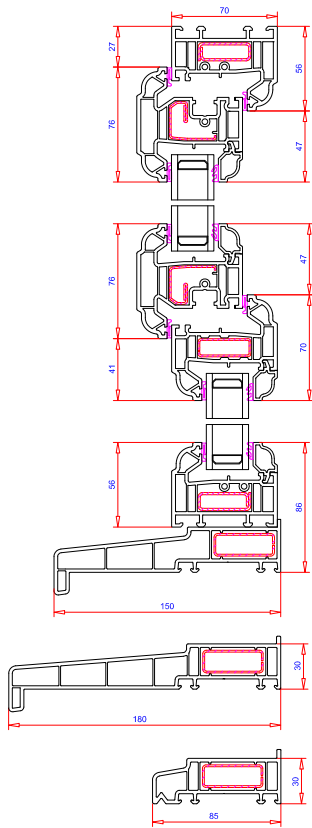



Manufacturers window profile
1:5 scale

Window frame jamb detail

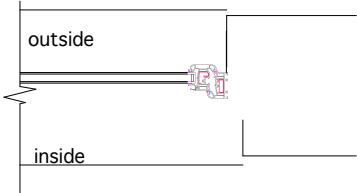

all existing window reveals, internal and external fabric to remain

Window frame sill and head detail

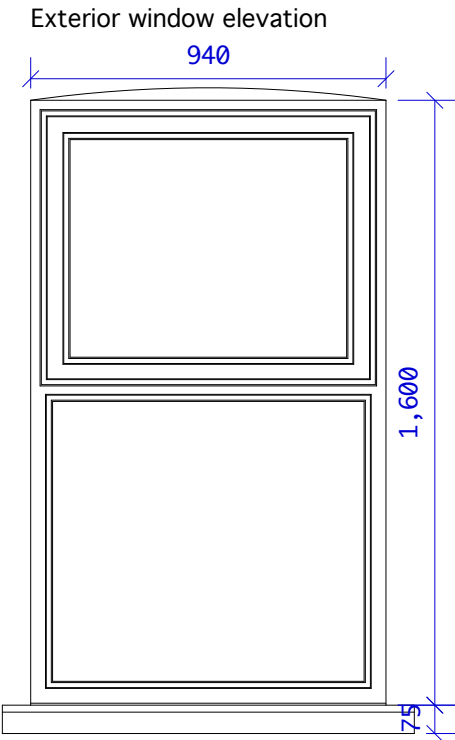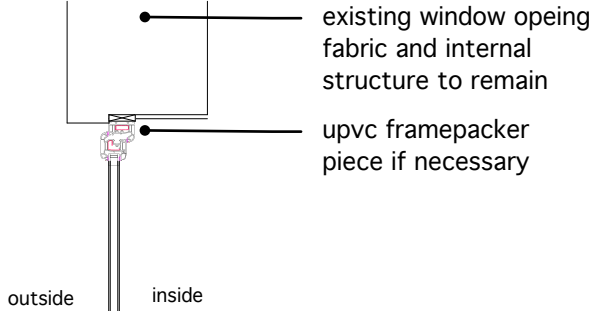

window head arched or horizontal depending on existing detail

all proposed glazing patterns to match existing windows

All dimensions to be site measured prior to manufacturing

internal timber sill
existing concrete sill

all existing window reveals, internal and external fabric to remain

Rev	Date:	Action:
This drawing is copyright.		
Dimensions to be checked on site and any discrepancies reported to the Architect immediately.		
Do not scale, use figured dimensions only.		

Clarence Place

upvc casement window detail

1:20 @ A3

2321-A114

6 north road, cardiff. cf10 3du
029 2034 0491
www.cfw-architects.co.uk