

**Materials**  
Logo: Fabricated aluminum with front retainer (102 mm deep green, 76 mm deep gray, 51 mm deep blue), painted; acrylic face with 1st surface vinyl; face illuminated  
Letters 1: 102 mm deep fabricated aluminum with front retainer, painted; day-night acrylic face; face illuminated (letters are black during the day & white when illuminated at night)  
Letters 2: 51mm deep fabricated aluminum with 51mm long standoffs, painted; 5 mm clear polycarbonate back; halo illuminated


**Colors**  
Logo: PNT-01  
VIN-01  
PNT-06  
VIN-02  
PNT-03  
VIN-03  
Letters 1: PNT-04  
M-02  
Letters 2: PNT-07 (letters)  
PNT-05 (standoffs)

**Typestyles**  
Letters 1 & 2: Per corporate artwork


**Letter Heights**  
Logo: 1,219 mm  
Letters 1: 559 mm  
Letters 2: 225 mm

General Contractor to provide 13amp Electrical Feed to center of sign with 1m MIN cable to be left free for connection with sign.

Attachment details to be supplied by Signage Contractor.

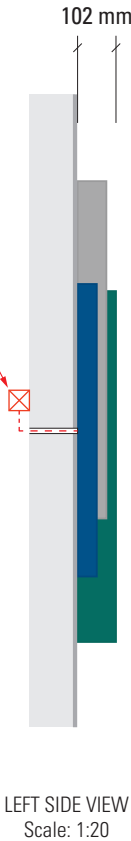

FRONT VIEW  
Scale: 1:20

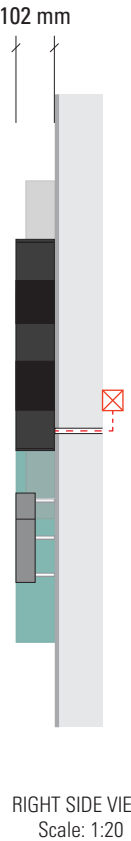

\*Illuminated signage not to exceed 200 cd/m2'