


Elevation Key	
No.	Description
01	Metal plank profiled cladding system with projecting vertical fins, finished in metallic copper colour PPC coating (RAL TBC)
02	Facing clay brickwork, pale yellow/grey colour cavity wall construction with feature bands and panels
03	Facing weather resistant Masonry Block, colour to match clay brickwork
04	Aluminium frames windows consisting of fixed glazing, opening vents, solid panels, weather louvres and inward opening panels with barrier louvres externally. Finished in metallic copper colour PPC coating (RAL TBC)
05	Aluminium framed curtain walling system with minimal external face profile to key feature areas, consisting of fixed glazing, opening vents, solid panels, weather louvres. Finished in warm grey colour PPC coating (RAL TBC)
06	Curtain wall system, with externally capped back-boxes finished in warm grey PPC coating (RAL TBC)
07	Expanded metal mesh screening fixed back to supporting steel, to screen plant and services with increased heights such as sprinkler tanks and dust extractors Colour and finish to match main building metal facade finish
08	Facing clay brickwork to service yard boundary walls, pale yellow/grey colour with feature bands and panels
09	Horizontal profiled cladding to provide variance to key facade areas, finished in metallic copper colour PPC coating (RAL TBC)
10	Large digital screen, surrounded with projected fins to provide relief and integration with the facade
11	Picture window surround, with deep reveals and angle profiles, finished in metallic copper colour PPC coating (RAL TBC)
12	Angled glazed rooflights providing daylight to central atrium
13	Integrated Swift nest box, colour to closely match brickwork
14	Integrated bat box, colour to closely match brickwork
15	Semi-open framing, with perforated/mesh panels dispersed throughout, finished in metallic copper colour PPC coating (RAL TBC)
16	Horizontal aluminium brise soleil over curtain walling, finished in metallic copper colour PPC coating (RAL TBC)
17	Aluminium framed curtain walling system consisting of fixed glazing, opening vents, solid panels, weather louvres. Finished in metallic copper colour PPC coating (RAL TBC)
18	Expanded metal mesh screening fixed in front of curtain walling, finished in metallic copper colour PPC coating (RAL TBC)

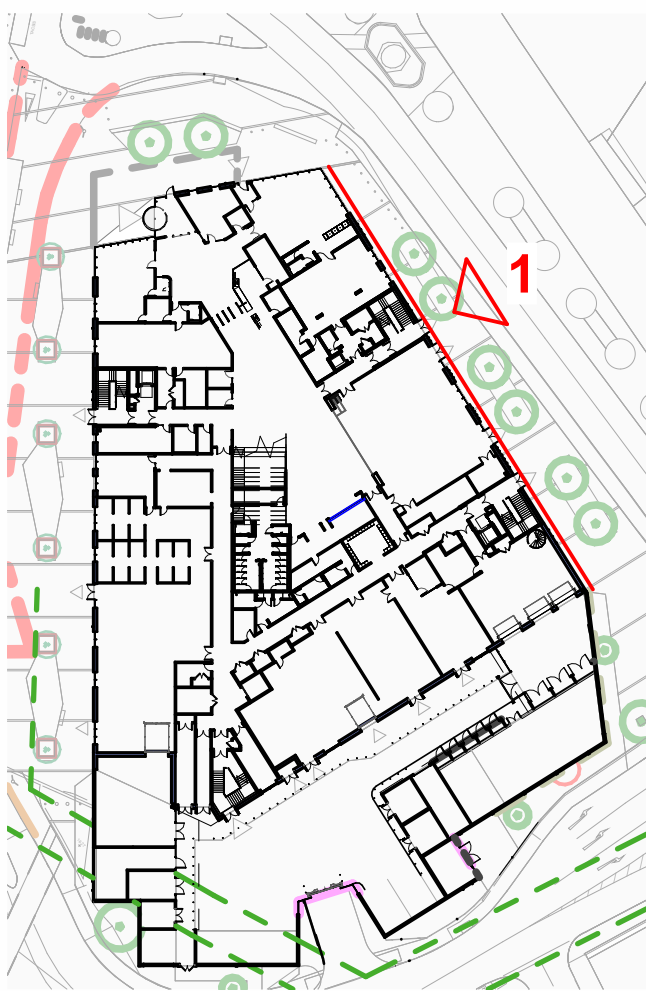

1 | Planning - East Elevation
1:100

Red line on elevations denotes a change in angle from the primary elevation

No.	Description	Drawn	Checked	Date Issued
001	Issued for External Notice Application			20.08.2024

DO NOT SCALE - Use figure dimensions only. This drawing is intended to show an impression of the design and is not to be used for construction. All dimensions shall be as indicated. The drawing shall only be used for the purpose for which it is intended and the user shall be responsible for any error without notice. No other reliance, or use of the drawing shall be made for any purpose without notice. The drawing shall be used for the purpose for which it is intended and the user shall be responsible for any error without notice. The drawing shall be used for the purpose for which it is intended and the user shall be responsible for any error without notice.	
Drawn	JWJ
Date	AUGUST 2024
Scale	@ A0
Status	AS INDICATED
PLANNING APPLICATION	

Austin-Smith:Lord Ltd	
Architects Designers Planners	
Landscape Architects	
18 Park Place	
Cardiff	
CF10 1DD	
t +44 (0)2920 225 208	
e cardiff@austin-smith-lord.com	
Drawings and models prepared by Austin-Smith:Lord Ltd 020 using AutoCAD 2024	
Job No.	NE5101-ASL-BA-ZZ-OR-A-09041
Drawing No.	201
Revision	
3/4/2025	