


Section Key:

1. Alumasc air & vapour control layer.
2. Alumasc thermal insulation, thickness determined to meet the U-value and dew point of the structure.
3. Alumasc underlay.
4. Alumasc cap sheet.
5. Alumasc 100x100mm reinforcing strip into the angle.

Detailing:

- (i) Alumasc Termination bar sealed with Derbitech sealstick HD.
- (ii) Roof-Pro ProFlash (lead alternative) cover flashing, or Code 4/5 lead cover flashing, by others.

Flame-free installation methods and/or materials must be used around any combustible materials which may be encountered. The contractor must enforce a torch-free zone as dictated by their insurers; however, it is recommended that this must be a minimum of 900mm.

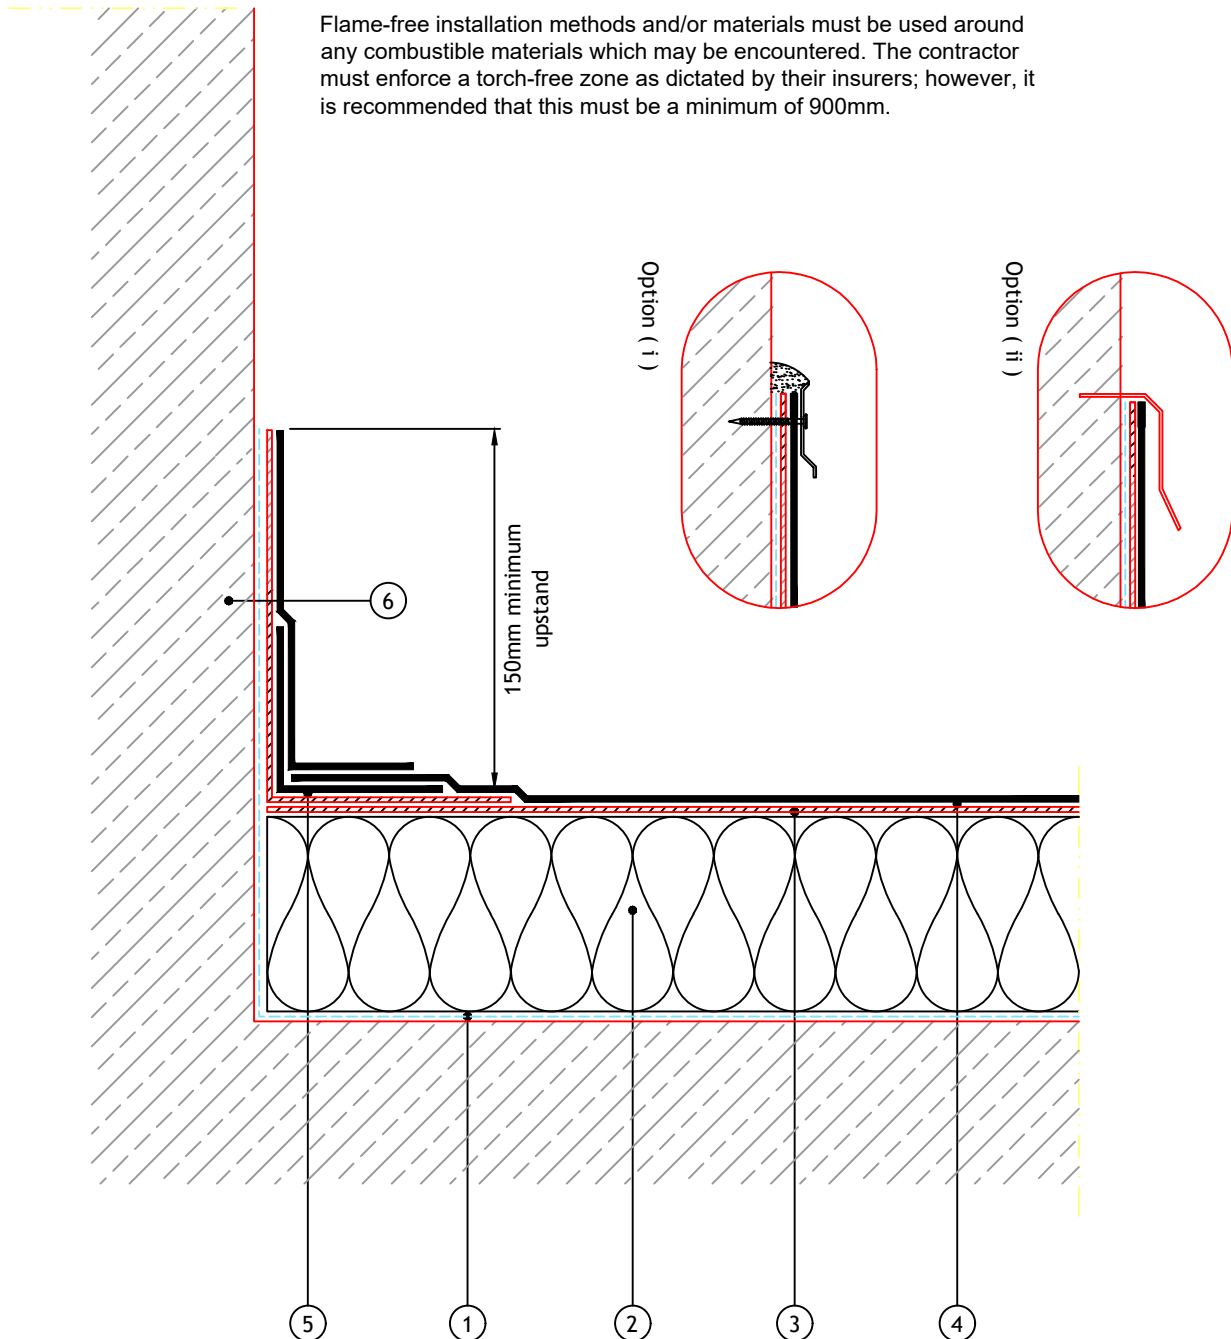

- This drawing was prepared to serve as a guideline representing typical detailing conditions and illustrate the correct application of Alumasc products only. It may be necessary to modify this detail in whole or in part in accordance with specific project conditions, design or requirements.
- Refer to the Alumasc project specification for product identification and method of application.



ALUMASC
ROOFING

+44 (0)1744648400
info@alumascroofing.com
www.alumascroofing.com

Alumasc Building Products Ltd
White House Works, Bold Road, Sutton St Helens, Merseyside WA9 4JG

Title:
Alumasc Two Layer Warm RBM
Abutment

Drawing No:
RBM-WT 03 01

Revision:

Scale:
Not to Scale

Date: