


CREATE YOUR PERFECT WINDOW



Technical details at a glance:

- Maximum sash sizes of 1500mm x 1500mm (top hung) or 900mm (side hung).
- Maximum vision – super slim sash to complement other door systems.
- Window Energy Rating of A which complies to Part L Requirements.
- Maximum security – PAS24:2022 compliant.
- Maximum insulation value – down to 1.4 U W/m2K.
- Maximum weatherproofing – weather tightness air permeability class 4 (600 Pa) & water tightness Class 8A (Side-hung) & Class E1500 (Top-hung).
- Single or dual colour. Factory powder coated to marine quality as per Qualicoat regulations, plus any RAL colour on request.
- Maximum sash weight- 50kg (top hung) & 40kg (side hung).
- Engineering-grade hardware for a smooth opening and closing operation.

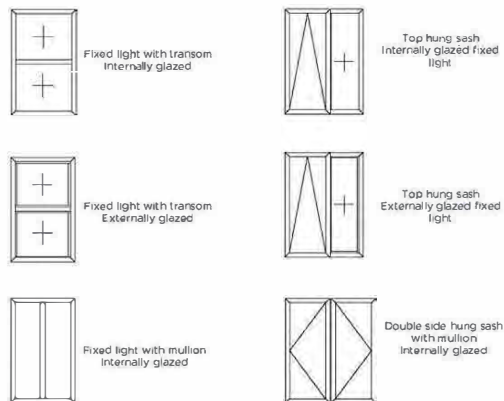


Types of Glazing

The **ACW81 Window** has a variety of glazing options to choose from, with a maximum glazing thickness of **28-44mm** including:

- External glazing
- Reverse adapter
- Dummy sash

Typical Window Openings

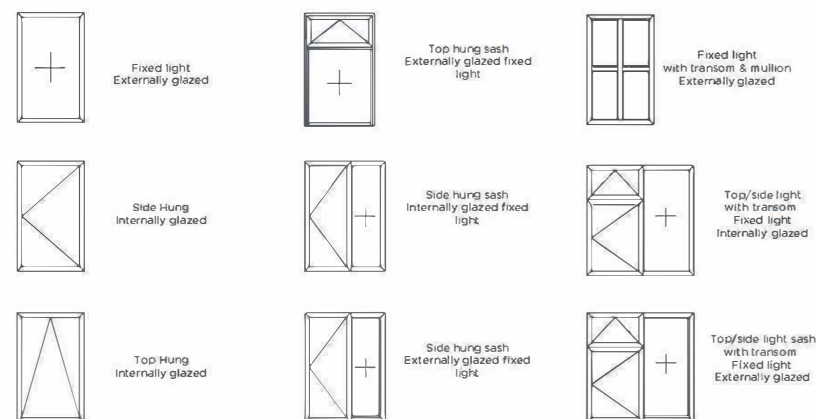

Configurations

Some of the most popular applications that can be made from the **ALUNA Window system** are listed below:

- Can be used as a side light with openers and easily couples to our **ALUNA Bifold door system**.
- Side-hung opener next to a fixed frame.
- French casement window with double side-hung openers.
- Standard casement window – top opener over a fixed frame.
- Crucifix 4-pane window with 2 top openers over 2 fixed frames.