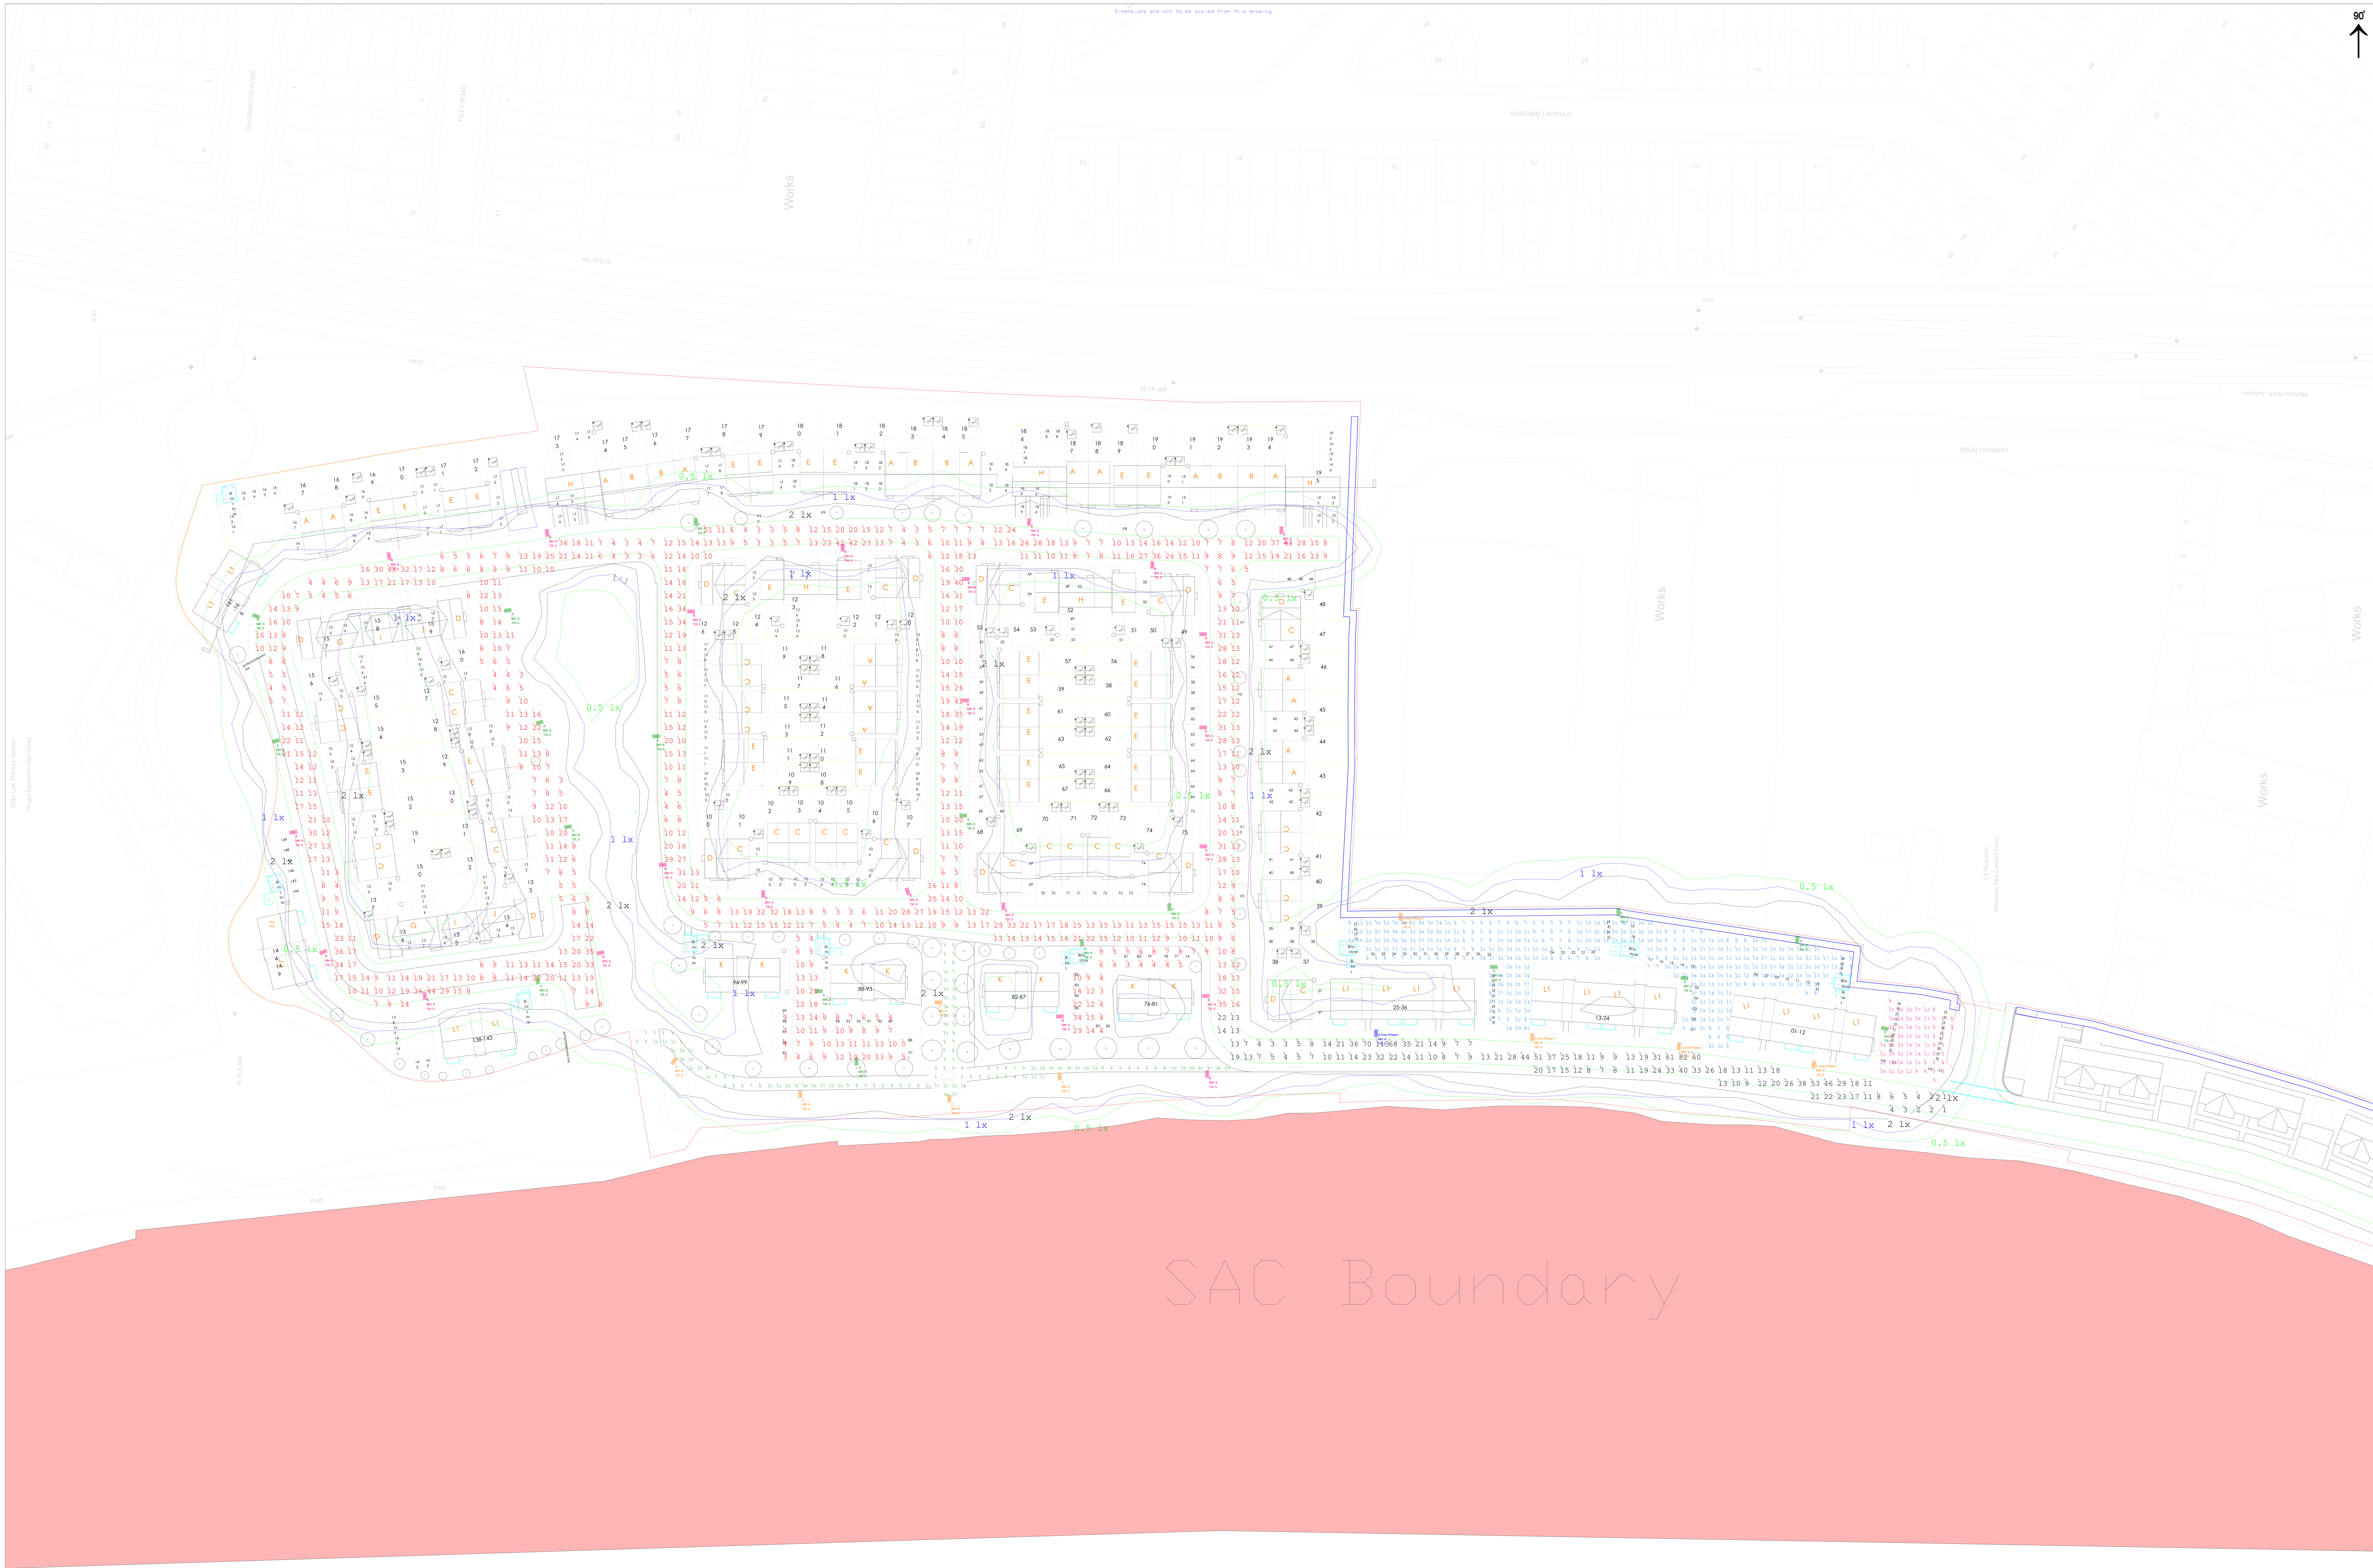

Calculation Summary							
Label	CalcType	Units	Avg	Max	Min	Min/Avg	Min/Max
Car Park - Pink	Illuminance	Lux	13.73	42	3	0.22	0.07
Estate Roads - Red	Illuminance	Lux	12.46	44	3	0.24	0.07
Rear Courtyard & Parking - Blue	Illuminance	Lux	15.31	84	4	0.26	0.05
Rear Road - Green	Illuminance	Lux	13.73	47	4	0.29	0.09
Road to Parking - black	Illuminance	Lux	19.30	113	1	0.05	0.01

Luminaire Schedule

Symbol	Qty	Label	Arrangement	LLF	Description
	4	C from Phase 1	SINGLE	0.900	76w (3 module) 700mA Italo 1 with STE-M Optic
	5	C	SINGLE	0.900	31w (2 module) 525mA Italo 1 with SV Optic column mounted at 6m.
	23	B	SINGLE	0.900	39w (2 module) 525mA Italo 1 with STE-M Optic column mounted at 6m
	1	A from Phase1	SINGLE	0.900	76w (4 module) 700A Italo 1 with SV Optic column mounted at 6m
	13	A	SINGLE	0.900	40.5w (2 module) 700mA Italo 1 with S05 Optic column mounted at 6m.
	5	D	SINGLE	0.900	58w (3 module) 700mA Italo 1 with S05 Optic column mounted at 6m

Kingfisher Lighting

Members Of

Kingfisher Lighting Ltd, Ratcher Way, Crown Farm Industrial Park,
Mansfield, Nottinghamshire. NG19 0FS
Tel 01623 415 942 Fax 01623 415 920
ld@kingfisherlighting.com www.kingfisherlighting.com

Project Title

Herbert Road Phases 2-4

Scale	Project No
1:500 at A0	D32766K
Date	**Drawing No**
10/4/2019	32766/PJ/K

A lighting applications design service is provided by us in good faith and without charge, relating to Kingfisher products only. As such, whilst every endeavor is made for accuracy from information provided by yourselves, the final responsibility for the suitability of the design lies with the client. The company cannot, therefore, accept any liability or consequential loss incurred.

Lighting Designer :Paul James