



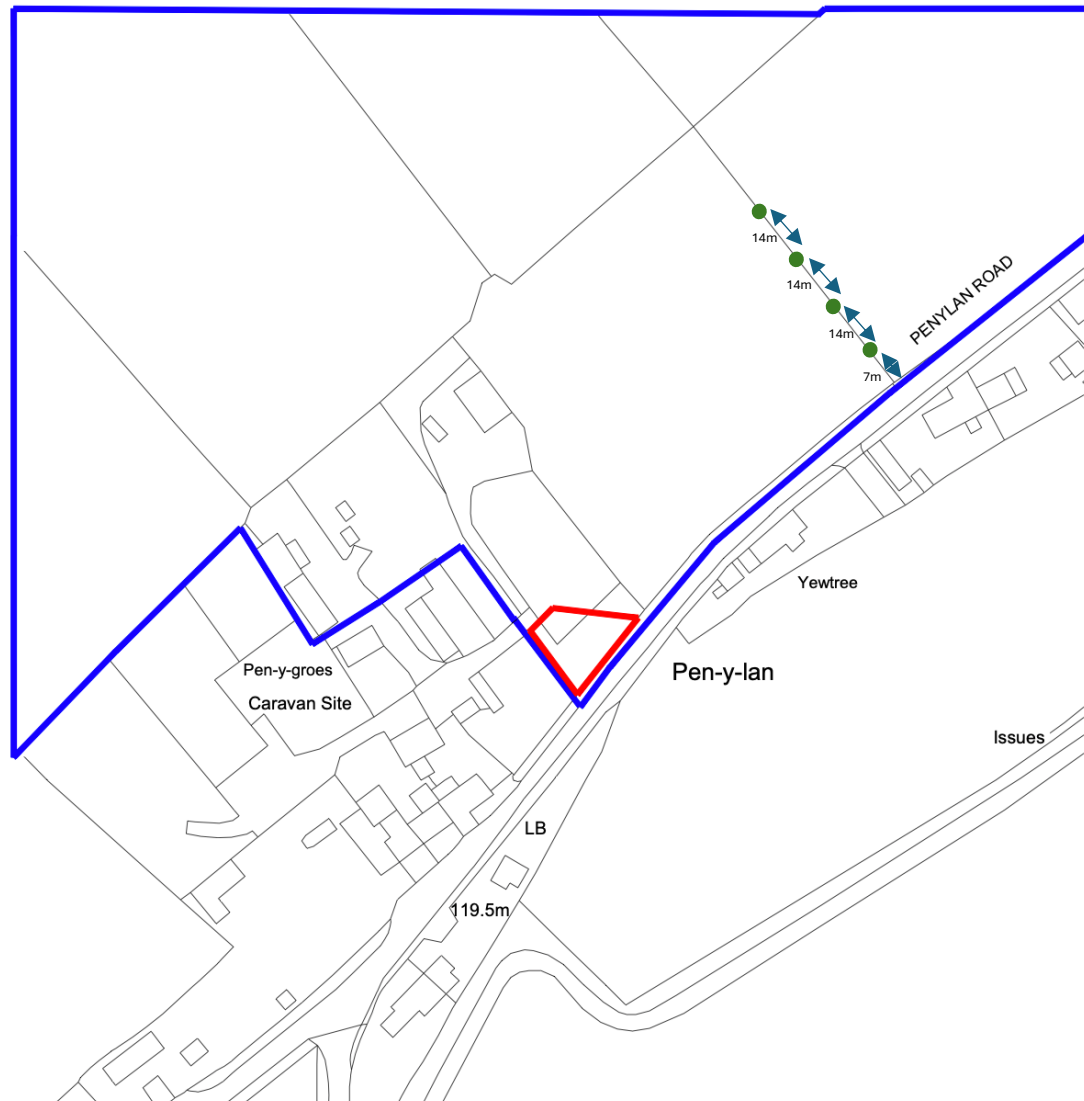

Proposed Location Plan



Revised tree planting plan

- 2x Pedunculate Oak (*Quercus Robur*)
- 2 x Common beech (*Fagus sylvatica*)
- Minimum 6-8cm girth
- Bare-root or container-grown nursery stock
- Planted during 1st available planting season following completion
- Staked and protected as necessary
- Watered and maintained for five years
- Any failures replaced during the next planting season
- Trees to be planted along field boundary
- First tree to be set back 7m from overhead wire line
- Remaining 3 trees to be planted at a minimum of 14m intervals.