



BS5837:2012 Tree Survey

Written By

Lydia Shabong

Reviewed and Approved By

Jason Harker

Arboricultural Consultant

ProHort Limited

Waterbridge Farm

Yarnfield Lane

Yarnfield

Stone

ST15 0NE

For

Louise O'Rourke

Dragon Park

Newport

NP19 4RA

17th April 2026

Waterbridge Farm
Yarnfield Lane
Yarnfield
Stone
ST15 0NE

Telephone: 01782 479479
Email: info@prohort.co.uk
Website: www.prohort.co.uk

Prohort Limited is a company registered in England and Wales company number 11233724

Contents

1.0	Introduction	3
2.0	Site and Surroundings.....	4
3.0	Development Proposals	13
4.0	Statutory Protection and Guidance.....	13
5.0	Hedgerow Guidance	14
6.0	Tree Protection Requirements.....	18
7.0.	Tree Population	20
8.0.	Management Recommendations	21
9.0.	Summary	23
10.0	Survey Method.....	23
11.0.	Site Plan – Tree Constraints Plan.....	30
	Appendix 1: Arboricultural Survey Data Sheet	31
	Appendix 2: BS 5837:2012 Terms and Definitions	34

1.0 Introduction

ProHort Limited have been commissioned by Louise O'Rourke to conduct an arboricultural survey of the land at Dragon Park, Newport, NP19 4RA. This report details the trees that are located within or on the boundaries of the site, their condition, and any recommended works to be conducted.

The survey was carried out on the 14th of April 2026 by means of inspection from ground level. Trees were assessed in accordance with *BS 5837:2012 Trees in relation to design, demolition and construction – Recommendations*.

Under the British Standard, the assessment of trees is made objectively and without influence by the client. The categorisation method identifies the quality and value of the trees that may be potentially influenced by any proposed works to a site as well as the impact of the tree upon the site.

Fencing and paving are within the influence of the trees surveyed.

A total of 4 individual trees (T1 – T4) and 2 hedgerows (H1 – H2) and 2 groups (G1 – G2) were surveyed and mapped (refer to Drawing 1). All arboricultural information recorded within the survey is presented within Appendix 1.

The composition of the soils on site was not assessed during the survey. The possibility of soil movement due to tree root activity can't be discounted.

This report provides the results of the survey and includes the following:

- A schedule of all trees located within the site that may influence the existing property (Appendix 1).
- An assessment based on *BS 5837:2012*, of the trees in terms of their potential value within any future development.
- On the basis of this assessment, the trees have been categorised into one of four categories: A, B, C or U.
- Advice on removal, retention and management of the trees (Sections 5 & 7).

- A Tree Constraints Plan detailing tree quality categories, for all trees surveyed (Appendix 1).

2.0 Site and Surroundings

2.1 The area surveyed is located at Dragon Park, Newport, NP19 4RA The plot is part of the grounds of Dragon Park and Newport Live which is a commercial site/field. It comprises of a 108m x 69m in-use grass football pitch which is enclosed by black 5m high fencing with peripheral tree cover. Site access is via an existing highway Southern Distributor Road.

2.2 Weather conditions during the survey were cloudy/overcast.

2.3 Images

Image 1 – T1



Waterbridge Farm
Yarnfield Lane
Yarnfield
Stone
ST15 0NE

Telephone: 01782 479479
Email: info@prohort.co.uk
Website: www.prohort.co.uk

Prohort Limited is a company registered in England and Wales company number 11233724

Image 2 – T2



Waterbridge Farm
Yarnfield Lane
Yarnfield
Stone
ST15 0NE

Telephone: 01782 479479
Email: info@prohort.co.uk
Website: www.prohort.co.uk

Prohort Limited is a company registered in England and Wales company number 11233724

Image 3 – T3



Waterbridge Farm
Yarnfield Lane
Yarnfield
Stone
ST15 0NE

Telephone: 01782 479479
Email: info@prohort.co.uk
Website: www.prohort.co.uk

Prohort Limited is a company registered in England and Wales company number 11233724

Image 4 – T4



Waterbridge Farm
Yarnfield Lane
Yarnfield
Stone
ST15 0NE

Telephone: 01782 479479
Email: info@prohort.co.uk
Website: www.prohort.co.uk

Prohort Limited is a company registered in England and Wales company number 11233724

Image 5 – H1



Waterbridge Farm
Yarnfield Lane
Yarnfield
Stone
ST15 0NE

Telephone: 01782 479479
Email: info@prohort.co.uk
Website: www.prohort.co.uk

Prohort Limited is a company registered in England and Wales company number 11233724

Image 6 – H2



Waterbridge Farm
Yarnfield Lane
Yarnfield
Stone
ST15 0NE

Telephone: 01782 479479
Email: info@prohort.co.uk
Website: www.prohort.co.uk

Prohort Limited is a company registered in England and Wales company number 11233724

Image 7 – G1



Waterbridge Farm
Yarnfield Lane
Yarnfield
Stone
ST15 0NE

Telephone: 01782 479479
Email: info@prohort.co.uk
Website: www.prohort.co.uk

Prohort Limited is a company registered in England and Wales company number 11233724

Image 8 – G2



Waterbridge Farm
Yarnfield Lane
Yarnfield
Stone
ST15 0NE

Telephone: 01782 479479
Email: info@prohort.co.uk
Website: www.prohort.co.uk

Prohort Limited is a company registered in England and Wales company number 11233724

3.0 Development Proposals

3.1 There is proposed development on the site, consisting of:

- Construction of a new 108m x 70m 3G Synthetic Sports Pitch with twin-wire fencing.
- Allowance for an extension across one touchline for the inclusion of the spectator area.
- Installation of a new Spectator Area with the inclusion of 2 prefabricated 125-seater stand and TV Gantry
- Installation of a new 8 column LED floodlighting system
- New engineered base, drainage network and surfacing. 6) Allowance for an extension to the east side of the pitch to create a suitable parking area and facility unit.
- Allowance to re-direct the existing pathway to allow for the intended extension of the pitch.
- Provision of a small on-site parking area to the eastern side of the pitch to support players, officials, staff and spectators, integrated within the Dragon Park sports village layout.

4.0 Statutory Protection and Guidance

National Planning Policy Framework (NPPF)

4.1.1 The NPPF assumes protection of all ancient woodland and veteran trees unless it can be clearly demonstrated that the need for or benefits of development outweighs the loss. In this respect, ancient woodland is defined as an area which has been wooded continuously since at least 1600 AD. A veteran tree is one of exceptional value for wildlife, in the landscape, or culturally because of its great age, size or condition.

4.1.2 On this site, there are no ancient woodland or veteran trees.

5.0 Hedgerow Guidance

5.1. Hedgerow Legislation

- 5.1.1. Any hedgerow can be protected by the Hedgerow Regulations 1997. Under the Hedgerow Regulations 1997, it is prohibited to destroy or remove any hedgerows prior to obtaining consent from the Local Planning Authority (LPA); however, the regulations are not applicable to hedgerows within the curtilage, or marking the boundary, of a dwelling house.
- 5.1.2. If a hedgerow is over 30 years old and approximately 20m in length, permission is required prior to removing it.
- 5.1.3. To obtain permission, a Hedgerow Removal Notice must be submitted to the relevant LPA, in accordance with Schedule 4 of the Hedgerow Regulations 1997.
- 5.1.4. The removal of any hedgerow is permitted, in accordance with the Hedgerow Regulations 1997, if it is required for:
 - 5.1.4.1. Making a new opening in substitution for an existing opening that gives access to land, subject to the Hedgerow Regulations 1997.
 - 5.1.4.2. Obtaining temporary access to any land to give assistance in an emergency.
 - 5.1.4.3. Obtaining access to land where another means of access is not available or is available only at disproportionate.
 - 5.1.4.4. The purposes of national defence.
 - 5.1.4.5. Carrying out development for which planning permission has been granted or is deemed to have been granted, except development for which permission is granted by article 3 of the Town and Country Planning General Permitted Development Order 1995 (1) in respect of development of any of the descriptions contained in Schedule 2 to that Order other than Parts 11 (development under local or private Acts or orders) and 30 (toll road facilities).

- 5.1.4.6. Carrying out, pursuant to, or under, the Land Drainage Act 1991 (2), the Water Resources Act 1991(3) or the Environment Act 1995 (4), work for the purpose of flood defence or land drainage.
 - 5.1.4.7. Preventing the spread of, or ensuring the eradication of either:
 - 5.1.4.7.1. Any plant pest, in accordance with the Plant Health (GB) Order 1993(5), in respect of which any action is being, or is to be, taken under Article 22 or 23 of that Order.
 - 5.1.4.7.2. Any tree pest, in accordance with the Plant Health (Forestry) (GB) Order 1993(6), in respect of which any action is being, or is to be, taken under Article 21 or 22.
 - 5.1.4.8. The carrying out by the Secretary of State of his functions in respect of any highway for which he is the highway authority (7) or in relation to which, by virtue of section 4(2) of the Highways Act 1980, he has the same powers under that Act as the local highway authority.
 - 5.1.4.9. Carrying out any felling, lopping or cutting back required/permitted as a consequence of any notice given/order made under paragraph 9 of Schedule 4 for the Electricity Act 1989 (8) (felling, lopping or cutting back to prevent obstruction of or interference with electric lines and plant or to prevent danger.
 - 5.1.4.10. The proper management of the hedgerow.
 - 5.1.4.11. Where the removal of a hedgerow to which these Regulations apply is permitted by these Regulations only by paragraph (1)(a), the person removing it shall fill the existing opening by planting a hedge within 8 months of the making of the new opening.
- 5.1.5. Work being permitted under these Regulations does not affect any prohibition or restriction imposed by or under any other enactment or by any agreement.

5.2. Assessment

- 5.2.1. The main purpose of the Hedgerow Survey is to establish the value of hedgerows that fall within the survey boundary, which will determine the 'importance' of the hedgerow, in accordance with the criteria set out in the Hedgerow Regulations 1997.

- 5.2.2. The Hedgerow Regulations 1997 outline a system to identify and protect any hedgerows deemed 'important'.
- 5.2.3. A hedgerow is defined as a line of trees and shrubs over 20 meters in length with a width less than 5 metres at the base. The length is determined by an intersection or termination, or by the presence of a junction.
- 5.2.4. The Hedgerow Regulations 1997 apply predominately to hedgerows in England and Wales; however, they do also apply to any hedgerow or adjoining common land, village greens, Sites of Special Scientific Interests, including protected land. They also apply to agricultural land and forestry as well as land utilised for the keeping and breeding of donkeys, horses and ponies, if:
- 5.2.4.1. It has a continuous length of, or exceeding, 20 metres; or
 - 5.2.4.2. It has a continuous length of less than 20 metres **and** at each end, meets another hedgerow.
 - 5.2.4.3. The Hedgerow Regulations 1997 do not apply to garden hedges. Any hedges marking a boundary or within the curtilage of a dwelling house are exempt from these regulations.
- 5.2.5. To analyse the 'importance' of a hedgerow, the ecological, landscape and archaeological factors associated with the hedgerow will be considered. These are:
- 5.2.5.1. Has the hedgerow existed for 30 years or longer?
 - 5.2.5.2. Does the hedgerow satisfy at least one of the criteria listed in Part 1 of Schedule 1 in the Hedgerow Regulations 1997?
- 5.2.6. To be considered 'important', a hedgerow must meet any of the criteria below.
- 5.2.7. Archaeological and History**
- 5.2.7.1. Marks a pre-1850 township or parish boundary.
 - 5.2.7.2. Incorporates and archaeological feature.
 - 5.2.7.3. Is part of, or associated with, an archaeological site.
 - 5.2.7.4. Marks the boundary of, or is associated with a pre-1600, estate or manor.

5.2.7.5. Forms an integral part of a pre-Parliamentary system.

5.2.8. Wildlife and Landscape

- 5.2.8.1. Contains certain categories of bird, animal or plants listed in the Wildlife and Countryside Act or Joint nature conservation committee (JNCC) publications.
- 5.2.8.2. Includes at least 7 woody species, on average, in a 30-metre length.
- 5.2.8.3. Includes at least 6 woody species on average, in a 30-metre length to be associated with at least 3 of the following: Black Poplar Tree, Large Leaved Lime, Small Leaved Lime, Wild Service Tree.
- 5.2.8.4. At least 5 woody species on average, in a 30-metre length and be associated with at least 4 of the associated features.
- 5.2.8.5. Hedgerows that are located adjacent to a footpath, bridleway, or road used as a public path or byway open to all traffic **and** include at least 4 specified woody species, on average, in a 30-metre length **and** has at least 2 of the associated features.

5.2.9. Associated features

- 5.2.9.1. A bank or wall that supports the hedgerow along at least one half of its length.
- 5.2.9.2. Gaps which in aggregate do not exceed 10% of the length of the hedgerow.
- 5.2.9.3. On average, at least one tree per 50 metres.
- 5.2.9.4. At least 3 woodland species of the 57 woodland plants.
- 5.2.9.5. A ditch along at least half the length of the hedgerow.
- 5.2.9.6. A number of connections to other hedgerows, woodlands or ponds.
- 5.2.9.7. A parallel hedgerow within 15 metres.

5.3. Hedgerow Survey Results

5.3.1. Hedgerow one (H1)

This hedgerow is made up of Barberry, Ivy and Bramble. The average diameter of the stems is 30mm at 1.5m tall. The hedge was in relatively fair condition. It is a managed hedge adjacent to a ditch. There are several broken branches in canopy.

Waterbridge Farm
Yarnfield Lane
Yarnfield
Stone
ST15 0NE

Telephone: 01782 479479
Email: info@prohort.co.uk
Website: www.prohort.co.uk

5.3.2. Hedgerow two (H2)

This hedgerow is made up of 80% bramble, 10% forsythia and 10% privet. The average diameter of the stems is estimated 30mm at 2m tall. The hedge was in relatively fair condition.

6.0 Tree Protection Requirements

6.1. Tree Preservation Orders and Designations

6.1.1. Local authorities reserve the right to create Tree Preservation Orders (TPO) to protect the amenity value conferred to a location by a single tree or group of trees. Where a TPO is in force, lopping, topping, felling, uprooting or wilful damage caused to a tree such actions are prohibited and such actions may be prosecuted and incur a fine of up to £20,000 per tree affected. Works to TPO protected trees must only be undertaken with the written consent of the local authority.

6.1.2. Information on TPOs in the area surveyed could not be obtained. This information will need to be found before any works take place.

6.1.3. There are certain circumstances where written permission from the local planning authority may not be necessary before undertaking works. These include;

- Making a tree safe if it is an imminent threat to people or property.
- Removing dead wood, or a dead tree.

Owners, managers or any persons wishing to undertake work as an exemption to the written permission process **are required** to provide the local planning authority with 5 days' notice prior to attending to a tree which they deem as being dead or dangerous, unless such works are required in an emergency. It is the tree owner's responsibility to provide proof that the tree was indeed dead or dangerous should this exception be challenged; hence, it is advisable always to request an inspection by the local authority Tree Officer prior to carrying out such operations. Furthermore, and even in the event of an emergency, there is

still a duty to notify the local planning authority that work has been completed including supplying an explanation of the necessity.

6.2. Protected Species – Bats

- 6.2.1. Mature trees often contain cavities, crevices and hollows which are a potential habitat for roosting bats. Bats are afforded protection under Schedule 5 of the wildlife and Countryside Act 1981 (as amended), as well as under Schedule 2 of the Conservation of Species and Habitats Regulations 2010 and as such causing damage to a bat roost constitutes an offence.
- 6.2.2. A preliminary ground level appraisal of the wildlife habitat value of each tree was undertaken as part of the arboricultural survey. No trees were noted as having features suitable to support roosting bats.
- 6.2.3. Should the presence of a bat roost be suspected whilst undertaking works on any trees and groups on site, operations must be halted until a licensed bat handler or ecologist can provide advice.
- 6.2.4. T1, T2, and T3 have been considered to have bat roosting features, and a PRA to ascertain their bat roosting potential is recommended.

6.3. Protected Species – Birds

- 6.3.1. Trees are a potential habitat for nesting birds, which as well as their nests and eggs are protected under the *Wildlife and Countryside Act 1981* (as amended). This makes it an offence to intentionally or recklessly, damage or destroy an active bird's nest or any part thereof.
- 6.3.2. Due to the suitability of the trees within the vicinity of the survey boundary for nesting birds, all tree work should ideally be undertaken outside the bird nesting season (British bird nesting season: March to August inclusively). If this is not possible then a detailed inspection of each tree should be undertaken by a qualified ecologist prior to arboricultural works. Should an active nest be found (being built, containing eggs, or chicks) work must be halted until the nest becomes inactive.

6.3.3. There was a bird's nest found in T3 and a bird box with a potential bird's nest in G2.

7.0. Tree Population

7.1. 4 individual trees (T1 – T4) and hedges (H1 – H2) and groups of trees (G1 – G2) were recorded that are growing within the boundaries of the surveyed site. A schedule of all the trees and groups in terms of species, condition, age, management recommendations and *BS 5837:2012* quality categories is provided in Appendix 1.

7.2. The tree population recorded is not entirely confined within the site boundary with elements typical with its existing use as a commercial field. Tree cover is prevalent along the South boundary and West Boundary.

7.3. Tree Quality Categorisation

7.3.1. Under *BS 5837:2012 Trees in relation to design, demolition and construction – Recommendations* trees and groups objectively assigned a quality category designed to quantify their value within any future development. Table 1, below, presents a summary of the categories presented in the British Standard.

Table 1: Summary of BS 5837:2012 tree quality categorisation criteria.

Category A	Trees of high value including those that are particularly good examples of their species and/or those that have visual importance or significant conservation or other value.
Category B	Trees of moderate value including those that do not qualify as Category A due to impaired condition and/or those that collectively have a higher value than they would as individuals; also trees with material conservation or other value.

Category C	Trees of low value including those with very limited merit or impaired condition; trees offering transient or temporary landscape benefits.
Category U	Trees with irremediable defects and anticipated early loss due to collapse; dead trees or those in immediate decline and those with infectious pathogens.

The rationale of this designation is to take account of individual trees or landscape features that may contain attractive or unusual qualities or characteristics, but are of poor form, poorly sited, or have a predicted lifespan of less than 20 years due to inherent weaknesses or faults as detailed in the *Schedule of Trees*.

8.0. Management Recommendations

8.1 Tree Work

8.0.1. All tree surgery including felling work should be carried out by a qualified contractor in accordance with *BS 3998:2010 Tree work- Recommendations*.

8.0.2. All tree surgery works, once approved by the Local Planning Authority, should be carried out prior to any other site works.

8.0.3. **Cultural Implications for Retained Trees** - It is not necessary to undertake access facilitation pruning (AFP)

8.1. Mitigation for the removal of trees

8.1.1. Two individual trees (T2 and T3) must be removed to facilitate further development. T2 and T3 are low value trees (Category U). Mitigation for the loss and associated habitats may be required in the form of replacement tree planting.

8.1.2. The National Planning Policy Framework (NPPF) is a material consideration in the planning process and promotes a presumption in favour of sustainable development. In terms of the natural environment, development should minimise impacts on biodiversity and provide a net gain in biodiversity where possible.

8.2. Post Work Tree Care

8.2.1. Hazard recommendations are based on observations at the time of the survey. Trees are dynamic living organisms whose structure is constantly changing. Even those in good condition can suffer from damage or stress. Following site development, regular (annual or biennial) inspections of all retained trees should be undertaken by a qualified Arboricultural Consultant.

8.2.2. Aftercare is vital to the survival of any newly planted trees. Provision should be made for a minimum of two years maintenance of newly planted trees and include watering, formative pruning and the checking of tree ties and stakes.

8.3. Foundation Depth Calculations

8.3.1. This report has been written in accordance with, and to satisfy the requirement of *BS 5837:2012*.

8.3.2. The nature of the soils on site was not assessed during the survey. The possibility of soil movement due to tree root activity cannot be discounted.

9.0. Summary

- 9.1 A total of 4 individual trees were recorded during the survey within the development area site boundary.
- 9.2 Based on an objective assessment made in accordance with *BS 5837:2012 Trees in relation to design, demolition and construction - Recommendations* the trees were all valued as either category B, C or U features.
- 9.3 The majority of the trees are confined to the periphery with elements commensurate with the previous formal use of the site.
- 9.4 Two trees must be removed to facilitate development.
- 9.5 Information on TPOs in the area surveyed could not be obtained. This information will need to be found to check if any trees fall within or are immediately adjacent to the site were identified as being subject to Tree Preservation Orders. However, this information needs to be checked with the council.
- 9.6 3 trees were found to have features suitable for roosting bats (T1, T2 and T3). It is recommended that a PRA is conducted on all three trees prior to works commencing.
- 9.7 The successful implementation of the proposed scheme presents a realistic opportunity for development.

10.0 Survey Method

The survey of the trees was conducted from ground level only. The nature of the soils on site was not assessed. Trees are dynamic living organisms with a constantly changing structure; even trees in good condition can suffer from damage or stress. The information recorded is presented as being correct at the time of the survey.

10.1 The following features of each tree, group of trees or wood have been recorded in the Arboricultural Survey Data Sheets at Appendix 1.

10.1.1. Species

The common name is given. The Latin name may also be given if further clarification is required.

10.1.2. Height

Top height of tree recorded in metres.

10.1.3. Stem Diameter

For single-stemmed trees, the measurement is taken at 1.5 metres above ground level and recorded in millimetres.

For multi-stemmed trees, an average of all stems measured at 1.5m above ground level is used.

For tree groups, a range from minimum to maximum diameters is provided based on measurements taken using one of the aforementioned methods.

10.1.4. No. of Stems

A count of stems arising below a height of 1.5 metres.

10.1.5. Crown Spread

The N, S, E and W branch spreads are recorded in metres to provide a representative crown shape.

10.1.6. Height of Lowest Branch

Crown clearance above ground level recorded in metres.

10.1.7. Direction of Lowest Branch

The direction of growth of the first significant branch from the point of attachment.

10.1.8. Maturity

Young: Trees that can reasonably be relocated or replaced like for like, without undue cost.

Middle Age: Trees in the established growth stage of their life with the potential to continue increasing in size.

Mature: Trees that have reached their ultimate size, given their location and surroundings.

10.1.9. Condition

Good, Fair, Poor: An overall assessment of a tree's physiological and structural state in which factors that may increase its susceptibility to the effects of development are taken into account.

10.1.10. Veteran

Trees that are in such a condition as to significantly increase their biological, cultural or aesthetic value. This is characteristic of, but not exclusive to, individuals surviving beyond that typical age range of species concerned.

10.1.11. Comments

A brief evaluation and description of the tree with comments on form, vitality, health and any significant defects or symptoms of ill-health.

10.2. BS 5837 Tree Quality Assessment

The tree quality assessment is based on Table 1 of BS 5837:2012 (See below). Four categories (A, B, C and U) are used to denote tree quality (A=High, B=Moderate, C=Low, U=Unsuitable for retention). Sub categories (1-3) denote the specific function value of the trees and the reasoning behind the allocation of a specific category (the subcategories may be used in combination but do not accumulate collective weight).

10.3. Root Protection Area (RPA)

The RPA is allocated to ensure that a sufficient area is left undisturbed during development. It is provided as an area (m²) and as the radius of a circle (m) typically plotted from the centre of the stem.

The RPA is calculated using a mathematical equation included in BS 5837:2012 (Table D.1) and is based on a tree's stem diameter. In some cases the RPA may need to be adapted to best reflect the likely area of the position of roots required to ensure survival; this may be based on criteria such as the tree's condition, species, crown spread and any barriers to growth. Any alteration must be justifiable but is made at the Arboricultural Consultants' discretion.

10.4 Recommendations

Recommendations for arboricultural works, etc. are based on the current land use and take into account the tree or group attributes without bias to the proposed development.

Any tree surgery works proposed as part of this Survey are recommended to mitigate any identified problems that may be caused by trees in close proximity to the existing property, fences and hard paving. To this end, should these recommendations be overruled, this Survey stands as the opinion of ProHort Limited, and therefore any damage or injury caused by trees recommended by this practice for felling or tree surgery works, to which the proposed schedule of works has been altered or the tree has been requested to be retained by the Local Planning Authority, cannot be the responsibility of this practice.

Whilst this is an arboricultural report, comments relating to non-arboricultural matters are given, such as built structures and soil data. Any opinion thus expressed should be viewed as provisional and confirmation from an appropriately qualified professional sought. Such points are clearly identified within the body of the report.

10.5 Estimated Remaining Contribution

An estimation of the life expectancy as a healthy functioning tree. This will be influenced by species and the condition of the tree at the time of the survey.

- Long: Greater than 40 years
- Medium: 20 – 40 years
- Short: Less than 20 years

Category	Description	Subcategory			Colour on Map
		Mainly arboricultural qualities	Mainly landscape qualities	Mainly cultural values, including conservation	
Trees unsuitable for retention					
Category U	Those in such a condition that they cannot realistically be retained as living trees in the context of the current land use for longer than 10 years.	Trees that have a serious, irremediable, structural defect, such that their early loss is expected due to collapse, including those that will become unviable after removal of other category U trees (e.g. where, for whatever reason, the loss of companion shelter cannot be mitigated by pruning. Trees that are dead or are showing signs of significant, immediate, and irreversible overall decline. Trees infected with pathogens of significance to the health and/or safety of other trees nearby, or very low-quality trees suppressing adjacent trees of better quality. <i>NOTE: Category U trees can have existing or potential conservation value which it might be desirable to preserve.</i>			Dark Red RGB Code: 127-000-000
Trees to be considered for retention					
Category A	Trees of high quality with an estimated remaining life expectancy of at least 40 years.	Trees that are particularly good examples of their species, especially if rare or unusual; or those that are essential components of groups or formal or semi-formal arboricultural features (e.g. the dominant	Trees, groups or woodlands of particular visual importance as arboricultural and/or landscape features.	Trees, groups or woodlands of significant conservation, historical, commemorative or other value (e.g. veteran trees or wood pasture)	Light Green RGB Code: 000-255-000

		and/or principal trees within an avenue)			
Category B	Trees of moderate quality with an estimated remaining life expectancy of at least 20 years.	Trees that might be included in Category A but are downgraded because of impaired condition (e.g. the presence of significant though remediable defects, including unsympathetic past management and storm damage), such that they are unlikely to be suitable for retention beyond 40 years; or trees lacking the special quality necessary to merit the Category A designation.	Trees present in numbers, usually growing as groups or woodlands, such that they attract a higher collective rating than they might as individuals; or trees occurring as collectives but situated so as to make little visual contribution to the wider locality.	Trees with material conservation or other cultural value.	Mid Blue RGB Code: 000-000-255
Category C	Trees of low quality with an estimated remaining life expectancy of at least 10 years, or young trees with a stem diameter below 150mm	Unremarkable trees of very limited merit or such impaired condition that they do not qualify in the high categories.	Trees present in groups or woodlands, but without this conferring on them significantly greater collective landscape value; and/or trees offering low or only temporary/transient landscape benefits.	Trees with no material conservation or other cultural value	Grey RGB Code: 091-091-091

Notes: All young trees are assessed as quality category 'C' but this does not preclude their retention within a development.

10.6 Limitations & Qualifications

Tree inspection reports are subject to the following limitations and qualifications.

General exclusions

Unless specifically mentioned, the report will only be concerned with above ground inspections. No below ground inspections will be carried out without the prior confirmation from the client that such works should be undertaken.

The validity, accuracy and findings of this report will be directly related to the accuracy of the information made available prior to and during the inspection process. No checking of independent third-party data will be undertaken. ProHort Ltd will not be responsible for the recommendations within this report where essential data is not made available or is inaccurate.

This report will remain valid for one year from the date of inspection but will become invalid if any building works are carried out upon the property, if soil levels altered in any way close to the property, or if tree work is undertaken. It must also be appreciated that recommendations proposed within this report may be superseded by extreme weather or any other unreasonably foreseeable events.

If alterations to the property or soil levels are carried out, or tree work is undertaken, it is strongly recommended that a new tree inspection is carried out.

It will be appreciated, and deemed to be accepted by the client and their insurers, that the formulation of the recommendations for the management of trees will be guided by the following: -

1. The need to avoid reasonable foreseeable damage.
2. The arboricultural considerations - Tree safety, Good Arboricultural practice (tree work) and aesthetics.


The client and their insurers are deemed to have accepted the limitation placed on the recommendations by the sources quoted in the attached report. Where sources are limited by time constraints or the client, this may lead to an incomplete quantification of the risk.



Jason Harker
Arboricultural Consultant
ProHort Limited

11.0. Site Plan – Tree Constraints Plan

Scaled plan of the existing development along with all relevant trees and hedges plotted along with Root Protective Area.

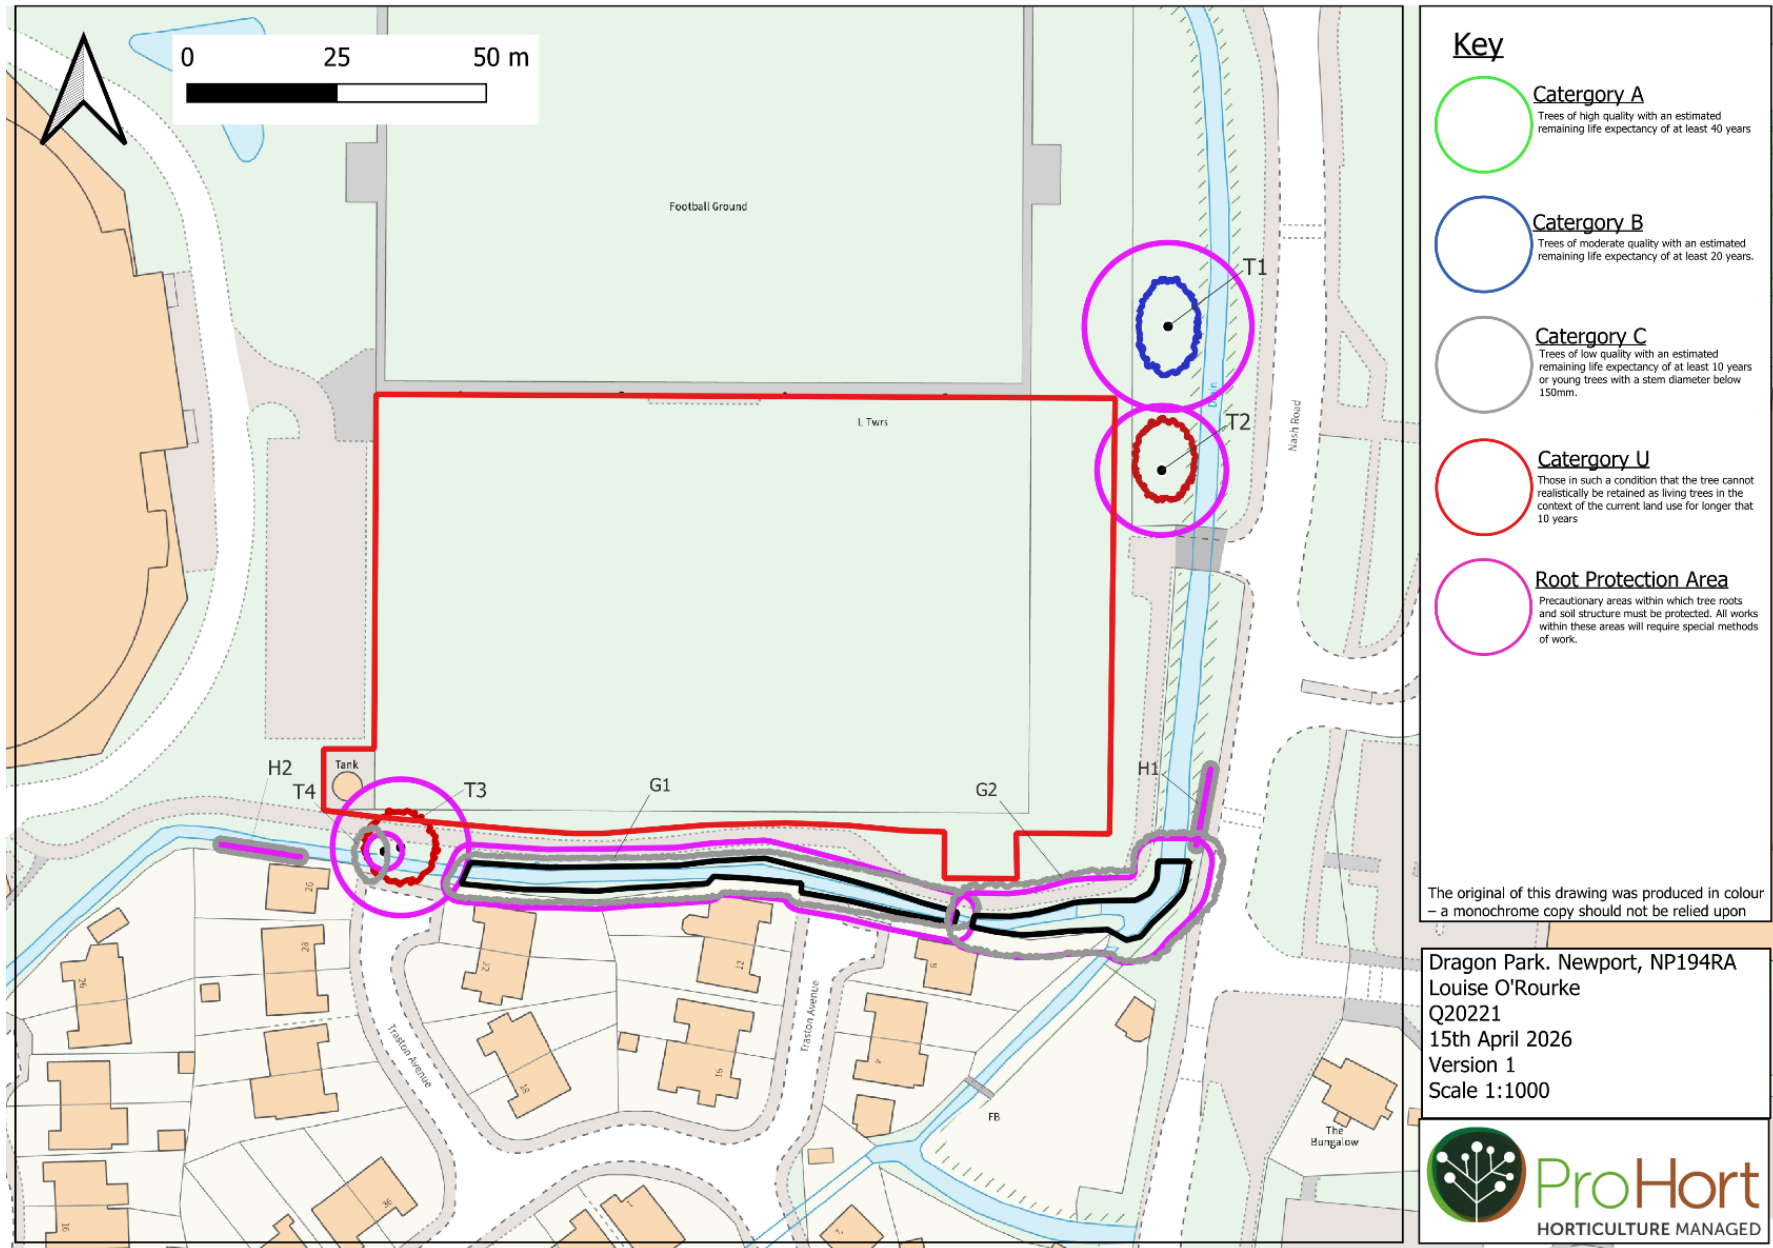

Appendix 1: Arboricultural Survey Data Sheet

Tree & Tag No Species	Height (m)	Stems		Crown		Age	RP		Physical Condition	Structural Condition		Preliminary Recommendations	Cat ERC
		No	Dia (mm)	Spread (m)	Clear (m)		A (m²) R (m)					Survey Comment	
T1 – Weeping Willow *	12.5	1	1170	N	8	0	M	A	619.4	Fair		- Significant damage to several large branches - Ivy cut at the base of the stem previously - Large stem broken on S and W aspect - Re-monitor every 12 months - Selected pruning of damaged branches - Tree to be inspected for roosting bat potential prior to works	B
				E	5	0.5			C		Poor		
				S	8	0			S		Fair		
									B		Good		
T2 – Weeping Willow *	12.5	1	900	N	8.5	0.5	M	A	366.5	Poor		- Ivy cut at the base of the stem - Open wounds at the base and higher in the stem - Tree to be inspected for roosting bat potential prior to works - Fell	U
				E	5.5				C		Fair		
				S	5	0.5			S		Poor		
									B		Poor		
T3 – Willow *	15	1	950 (Est)	N	6	4.5	0M	A	408.3	Poor		- Nest in the tree - Has been previously managed through pruning - Severe wound to the base	U
				E	6	4.5			C		Fair		
				S	6	4.5			S		Poor		
									B		Poor/ Decline		

													- Tree to be inspected for roosting bat potential prior to works - Fell - Ivy cover all along the stem	
T4 – Ash	13.5	1	250	N	4	7	SM	A	28.3	Fair			- Leans to the west - Light ivy cover along the stem	C
				E	0.5	11					C	Fair		
				S	5	4		R	3		S	Fair		
				W	5	4					B	Fair		

Tree & Tag No Species	Height (m)	Stems		Crown		Age	RP		Physical Condition	Structural Condition		Preliminary Recommendations Survey Comment	Cat ERC
		No	Dia (mm)	Spread (m)	Clear (m)		A (m²)	R (m)					
H1 – Barberry, Ivy, Bramble	1.5	-	Avg. 30	N	1	-	SM	A	0.4	Fair		- Managed hedge - Adjacent to ditch - Too dense to see an accurate measurement of stem diameter	C
				E	1	-					C	Fair	
				S	1	-		R	0.4		S	Fair	
				W	1	-					B	Fair	
H2 – Bramble, forsythia, privet	2	-	Avg. 30 (Est)	N	1	-	SM	A	0.4	Fair		- Majority bramble	C
				E	1	-					C	Fair	
				S	1	-		R	0.4		S	Fair	
				W	1	-					B	Fair	
G1 – Hawthorn, Sycamore	14	-	Avg. 320 (Est)	N	5	4.5	SM	A	46.3	Fair		- Overhangs road + pavement by 3.5m - Clears pavement by 3m - Clears the road by 5m - Trees on each side of the ditch - Ivy cover on stems (potentially remove)	C
				E	5.5	3					C	Fair	
				S	4	4					S	Fair	
				W	4	4.5		R	3.8		B	Fair	

													- Trees within group have wounds on stems (monitor)/lichen growth	
G2 – Hawthorn, Lilac, Elder, Western red cedar, Sycamore	7	-	Avg. 250 (Est)	N	2.5	0.5	SM	A	28.3	Fai			- Heavy ivy cover - Bird box in group – potential bird nest	C
				E	3.5	0.5					C	Fair		
				S	2	0.5					S	Fair		
				W	2.5	0.5		R	3		B	Fair		

Appendix 2: BS 5837:2012 Terms and Definitions

Access Facilitation Pruning

One-off tree pruning operation, the nature and effects of which are without significant adverse impact on tree physiology or amenity value, which is directly necessary to provide access for operations on site.

Arboricultural Method Statement

Methodology for the implementation of any aspect of development that is within the root protection area, or has the potential to result in loss of or damage to a tree to be retained.

Arboriculturist

A person who has, through relevant education, training and/or experience, gained expertise in the field of trees in relation to construction.

Competent Person

A person who has training and experience relevant to the matter being addressed and an understanding of the requirements of the particular task being approached.

NOTE - a competent person is expected to be able to advise on the best means by which the recommendations of this British Standard may be implemented.

Construction

Site-based operations with the potential to affect existing trees.

Construction Exclusion Zone

Area based on the root protection area from which access is prohibited for the duration of a project.

Root Protection Area (RPA)

Layout design tool indicating the minimum area around a tree deemed to contain sufficient roots and rooting volume to maintain the tree's viability, and where the protection of the roots and soil structure is treated as a priority.

Service

Any above or below ground structure or apparatus required for utility provision.

NOTE - examples include drainage, gas supplies, ground source heat pumps, CCTV and satellite communications.

Stem

Principal above ground structural component(s) of a tree that supports its branches.

Structure

Manufactured object, such as a building, carriageway, path, wall, service run, and built or excavated earthwork.

Tree Protection Plan

Scale drawing, informed by descriptive text where necessary, based upon the finalized proposals, showing trees for retention and illustrating the tree and landscape protection measures.

Veteran Tree

Tree that, by recognized criteria, shows features of biological, cultural or aesthetic value that are characteristic of, but not exclusive to, individuals surviving beyond the typical age range for the species concerned.

11. *NOTE - these characteristics might typically include a large girth, signs of crown retrenchment and hollowing of the stem.*