


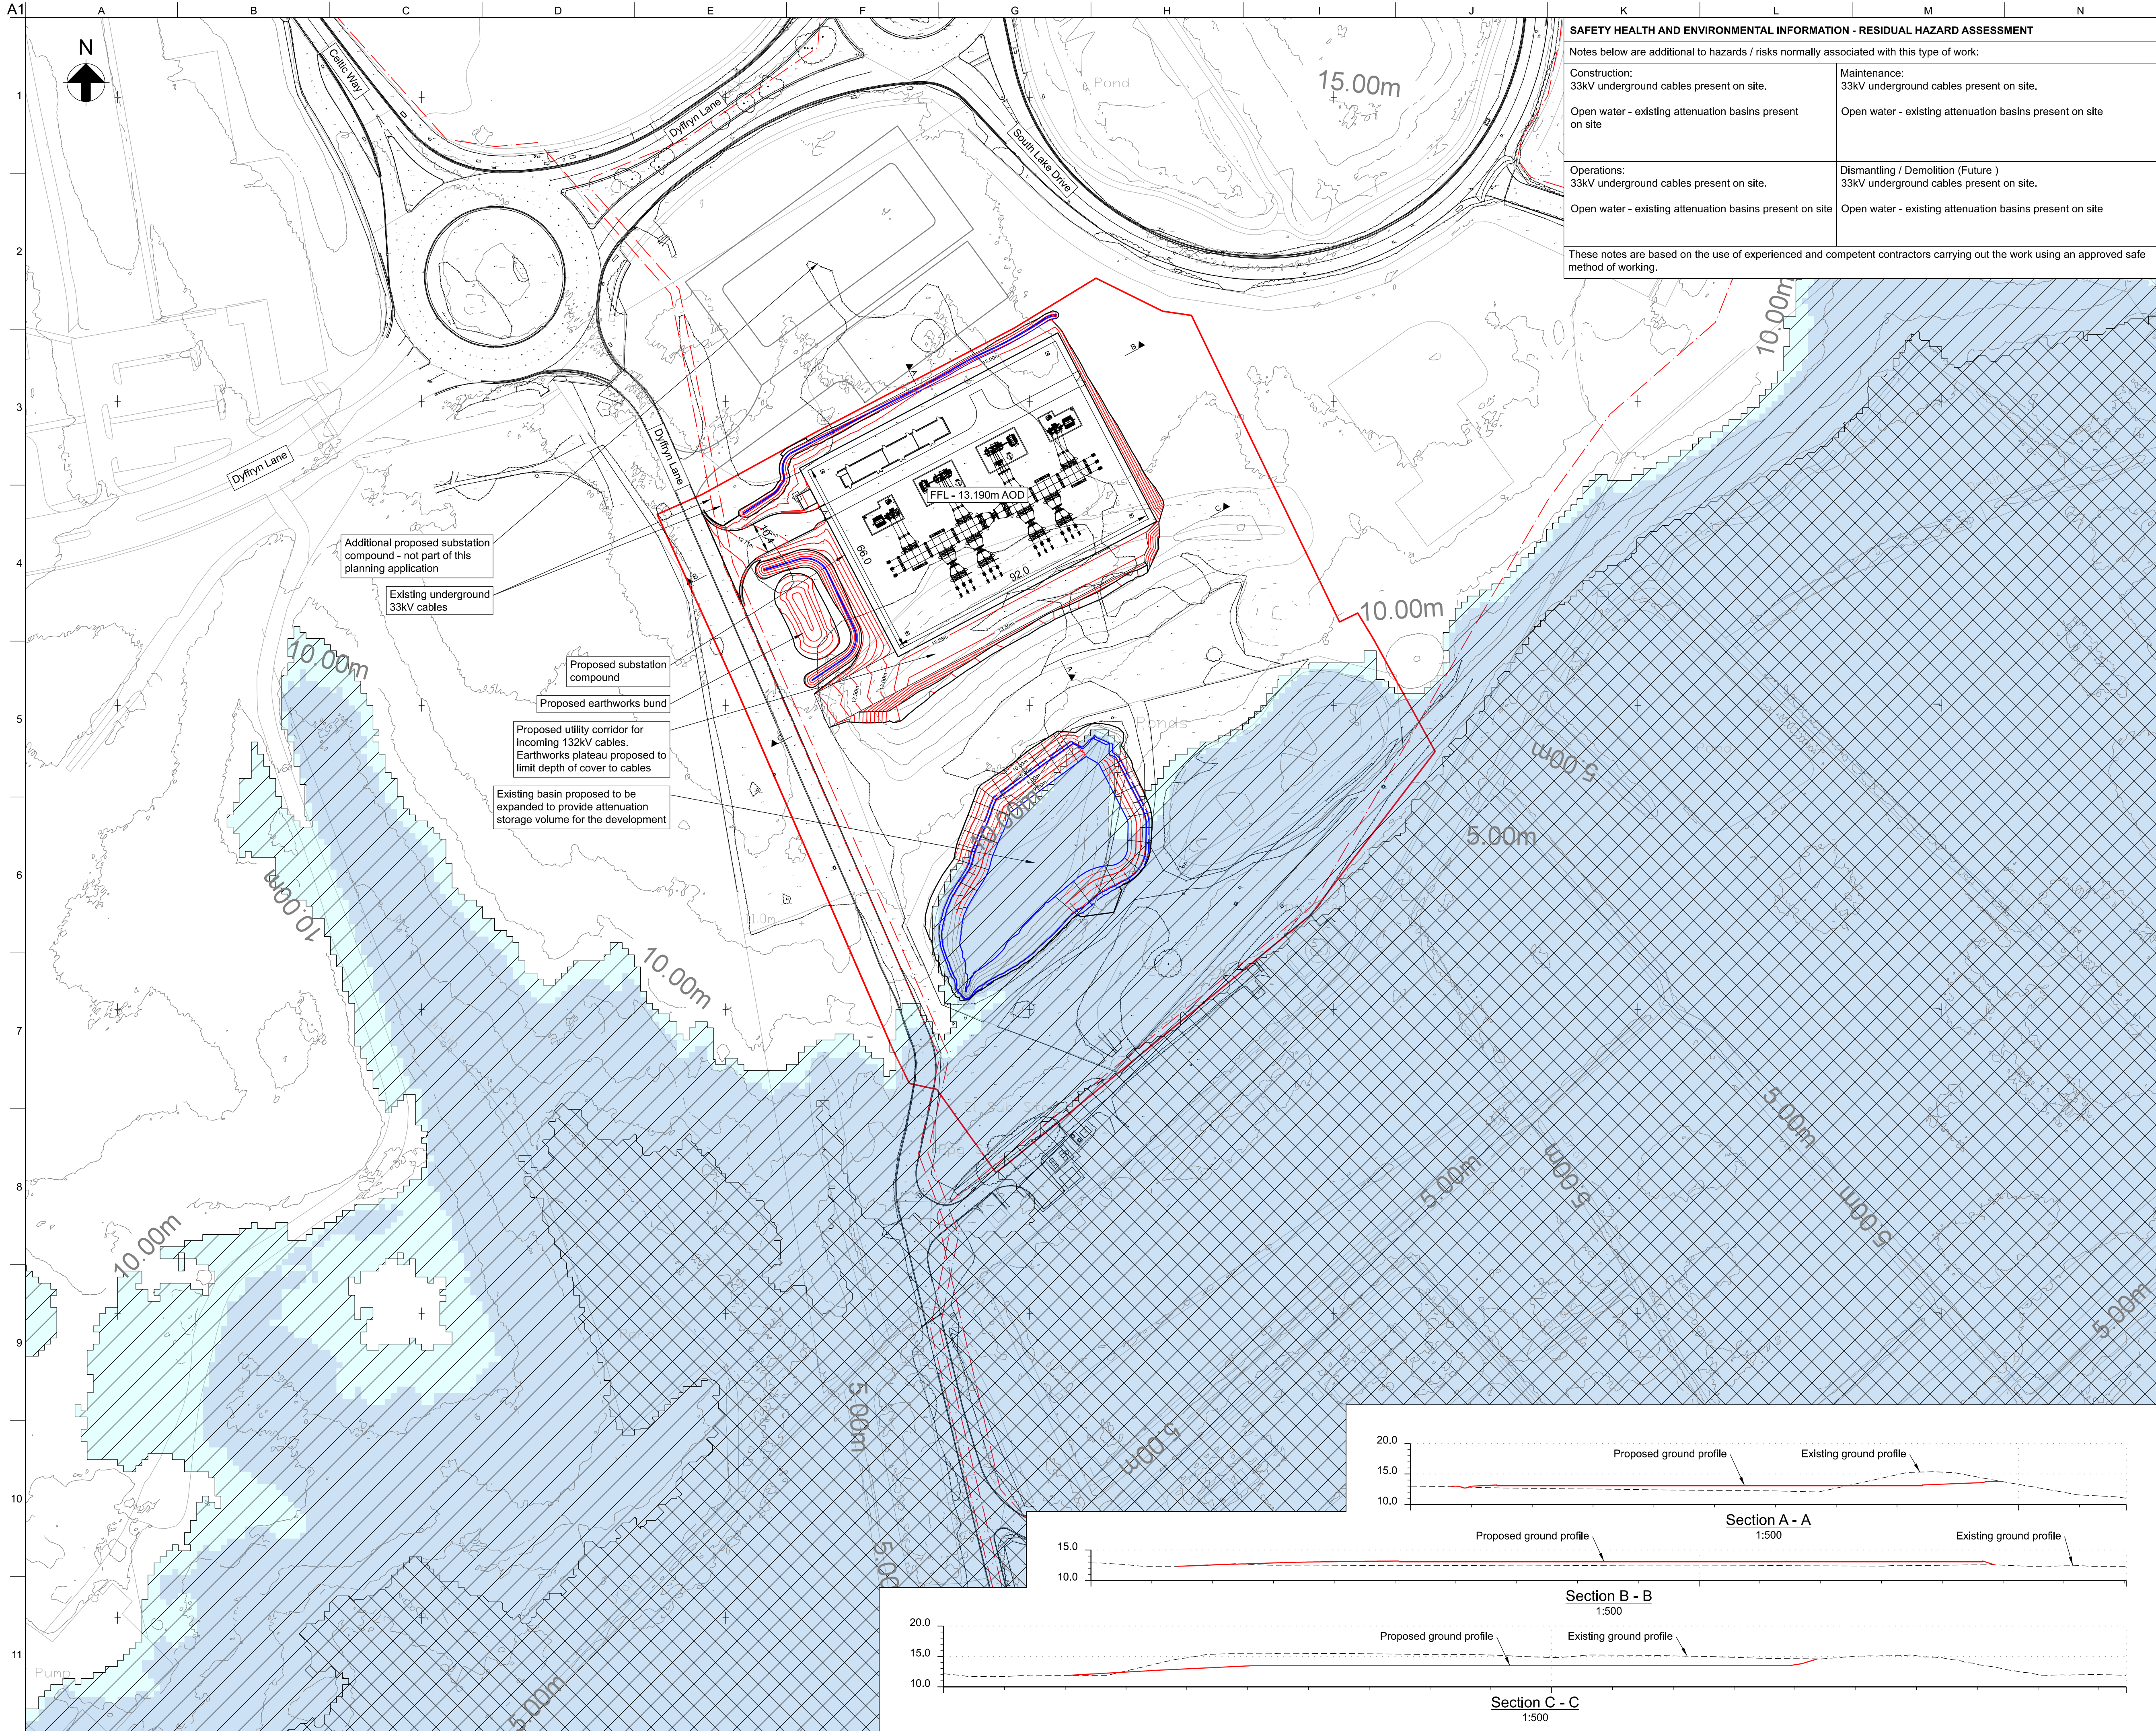

SAFETY HEALTH AND ENVIRONMENTAL INFORMATION - RESIDUAL HAZARD ASSESSMENT	
Notes below are additional to hazards / risks normally associated with this type of work:	
Construction: 33kV underground cables present on site.	Maintenance: 33kV underground cables present on site.
Open water - existing attenuation basins present on site	Open water - existing attenuation basins present on site
Operations: 33kV underground cables present on site.	Dismantling / Demolition (Future) 33kV underground cables present on site.
Open water - existing attenuation basins present on site	Open water - existing attenuation basins present on site
These notes are based on the use of experienced and competent contractors carrying out the work using an approved safe method of working.	

Legend

- Planning Application Boundary
- 43.00m Proposed Finished Level Major Contour (0.5m Intervals)
- Proposed Finished Level Minor Contour (0.1m Intervals)
- Existing 33kV Cables

TAN15 Flooding Zones

- Rivers and Sea Flood Zone 2
- Rivers and Sea Flood Zone 3
- Defended Zone Sea
- Defended Zone Rivers
- Defended Zone Rivers and Sea

- Notes**
- The details shown on the drawing are for Planning and are subject to approval by Newport County Council.
 - All dimensions and chainages in metres (m) and elevations in metres Above Ordnance Datum (m AOD) unless noted otherwise. Do not scale from this drawing.
 - The topographical survey information shown on this drawing was received from Geo-Info Ltd on 29/06/2023. No responsibility is taken for its accuracy.
 - TAN15 Extents based on NRW's Flood Map for Planning.
 - The positions of services and plant shown on this drawing are indicative only and were received from Found Digital DS Ltd on 19/06/2023. No guarantee is given for the accuracy of this information and it is intended for general guidance only.
 - Services may exist at various depths and their routes may deviate within the vicinity of the routes shown. The information must not be relied upon for excavation or other works. The onus of locating the services before using mechanical excavator or other plant, rests entirely on the contractor.
 - Where utilities are indicated there may be multiple cables present.
 - Other utilities may be present underground that are not shown on this drawing. Before any works are undertaken, the contractor is to ensure they are satisfied that the works area is utility free or that any identified utility can be managed safely.
 - Substation compound layout as provided by NGED on 26/09/2023.
 - Substation and associated infrastructure shown outside of site boundary is subject to a separate planning application. Features shown outside of the site boundary are subject to further third party design and are not intended for consideration as part of this planning application.

P04	09/06/25	CB	CL	DL
Issued for Section 73 Approval				
P03	27/09/23	RL	JN	DL
Issued for Planning				
P02	26/07/23	RL	JN	DL
Re-issued for PAC				
P01	19/07/23	RL	JN	DL
Issued for PAC				
Issue	Date	By	Chkd	Appd

ARUP

4 Pierhead St, Capital Waterside
Cardiff, CF10 4QP
T +44(0)29 20473727 F +44(0)29 20472277
www.arup.com

Client

Welsh Government

Job Title

Celtic Lakes

Drawing Title

Proposed Finished Levels

Scale at A1

1:1000

Discipline

Civils

Drawing Status

Job No	Drawing No	Issue
293651	CG1011	P04