



LRJ PLANNING

Planning, Design and Development

PARKING SURVEY

PROPOSAL: PROPOSED CHANGE OF USE FROM A SUPPORTED LIVING PROPERTY FOR UP TO 6 PERSONS (USE CLASS C3B) TO A 6 BEDROOM HOUSE IN MULTIPLE OCCUPATION (USE CLASS C4) AT 28 DEWSLAND PARK ROAD, NEWPORT, NP20 4EF

CLIENT: MR WILLIAMS - WILMONT ASSETS LTD

DATE: MAY 2026



CONTENTS

- 1.0 Introduction**
 - 2.0 Planning Policy Context**
 - 3.0 Site accessibility**
 - 4.0 Proposed Development and Parking Demand**
 - 5.0 Conclusion**
- Appendix A – Extent of Survey Area and Photographs**



1.0 Introduction

- 1.1 This Parking Survey has been prepared by LRJ Planning Ltd on behalf of the applicant to accompany the full planning application for the proposed change of use from a supported living property for up to 6 persons (Use Class C3b) to a 6 Bedroom House in Multiple Occupation (Use Class C4) at 28 Dewsland Park Road, Newport, NP20 4EF.
- 1.2 This appraisal describes the likely parking demand that will be generated by the proposal and whether this can be accommodated within surrounding streets. It has been carried out in accordance with the Lambeth Methodology prescribed by the Council.

2.0 Policy Context

TAN18 Transport

- 2.1 Technical Advice Note 18 (TAN18) details the Welsh Government's policies in terms of transport matters.
- 2.2 Paragraph 4.6 advises that maximum car parking standards should be used at regional and local level as form of demand management.
- 2.3 In Paragraph 4.7 identifies that in determining maximum car parking standards for new development regard should be given to, amongst other things:
- public transport accessibility;
 - opportunities for walking and cycling; and
 - the availability in the general area of safe public on street and off-street parking the potential for neighbouring or mixed-use developments sharing parking spaces at different times of the day or week.



- 2.4 Paragraph 4.13 deals specifically with the implementation of parking within new developments. It states that maximum parking standards should not be applied so rigidly that they become minimum standards and that maximum standards should allow developers the discretion to reduce parking levels. The potential for problems associated with overspill parking is recognised and applicants when undertaking a transport assessment are advised to assess the extent of existing on street parking pressures and the impact of the new development.

Manual for Streets

- 2.5 Paragraph 5.7 of TAN18 specifies that it is 'Manual for Streets' (MfS) provides technical guidance on street design 'and should be referred to by all organizations and professions engaged in designing new development'.
- 2.6 At paragraph 8.1.1 MfS states that accommodating parked vehicles is a key function of most streets particularly in residential areas and in 8.1.4 that parking can be provided on or off the street. The statements demonstrate that it is permissible to consider that the parking demand generated by new development can be catered for by on-street parking.
- 2.7 Paragraph 8.3.6 states that parking provision below parking demand can work successfully where adequate on street parking controls are present and where residents can reach day-to-day destinations such as jobs, schools and shops without the use of a car. The appeal site is located close to the district centre where there is good public transport accessibility and where the services and facilities provided within the district centre can be easily accessed on foot or by bicycle. MfS suggests that for residents who choose not to own a car, living in such an area may be an attractive proposition.



Newport adopted Local Development Plan (LDP) 2011 - 2026

- 2.8 Policy GP4 relates to general development principles in respect to Highways and Accessibility. Amongst other considerations development proposals must be accessible by a choice of transport modes and make adequate provision for car parking and cycle storage.
- 2.9 Policy T4 requires that development provides an appropriate level of parking provision in accordance with adopted parking standards.

Newport City Council Parking Standards Supplementary Planning Guidance 2012

- 2.10 The Parking Standards SPG sets out the Council's parking requirements for new developments. Parking requirements differ according to the location and relative accessibility of the development with areas of the Council allocated to one of five zones (zones 2 to 6).
- 2.11 The existing parking demand generated is 3 spaces. With regards the proposed use of the property as a HMO, in accordance with the Council's parking standards the demand generated is 7 spaces.

3.0 Site Accessibility

- 3.1 The property is located within easy walking distance of local amenities and services within Newport City Centre, as well as public transport including bus and frequent rail services. As a result, occupants will enjoy easy access to shops, services and facilities as well as local employment opportunities, therefore reducing the reliance on the private car. This accords with the overarching pursuit of sustainable development set out in Planning Policy Wales. Given the proximity to a range of local services, the absence of off-street parking is fully justified for an HMO.



4.0 Proposed Development and Parking Demand

- 4.1 The property does not benefit from any off-street parking, but given the sustainable location of the property, it is considered that this is fully justified. Notwithstanding this, a parking survey to understand the availability of on-street parking within 200 metres of the property has been provided in support of the application.
- 4.2 A parking stress survey was undertaken of the streets surrounding the property in the early hours of Wednesday 6th May 2026 and Thursday 7th May 2026. The survey method was to visit the area in the early morning when it is assumed that most residents would be home and the residential parking demand therefore would be at its greatest. The survey covered the streets within some 200m/2 minutes' walk of the application site as this was considered a reasonable distance within which future residents/visitors of the proposed development would look for a parking space.
- 4.3 The on-street parking capacity of the survey area has been calculated by measuring the length of kerbside parking available and dividing this by the length of a parking space (5m) as set out in the Lambeth Methodology. Lengths of kerb across driveway entrances and garages, as well as dedicated disabled parking spaces were not included within the calculation. The results of the survey are produced in the table below.



Parking Survey Results – all on street parking within 200m is restricted

Street (Restricted Parking)	Available Kerbside Parking Length (Metres)	Available kerbside parking - Parking Spaces Number	Wednesday 6th May 2026 at 05:30 No of cars	Wednesday 6th May 2026 at 05:30 No of cars (% occupied)	Thursday 7th May 2026 at 05:00 No of cars	Thursday 7th May 2026 at 05:00 No of cars (% occupied)
Dewsland Park Road (north side)	182	36	30	83.3	31	86.1
Dewsland Park Road (south side)	185	37	31	83.8	33	89.2
TOTAL	367	73	61	83.6	64	87.7

4.4 The parking survey covers an area of 200m. Typically, parking demand is at its highest during the early morning. The parking survey found that at least 9 parking spaces were available within the surrounding area to accommodate any increase in parking demand.

4.5 Given the above, as well as the fact that due to the nature of the proposed use, levels of car ownership are low, it is evident that there is capacity on surrounding streets to cater for the parking demand generated. This position has been supported in a number of appeal decisions where similar circumstances apply.


5.0 Conclusion

5.1 The site is in a sustainable and accessible location, which offers easy access to sustainable forms of transport, as well as a range of facilities and amenities. The parking survey that has been undertaken provides evidence that there is on-street parking capacity to accommodate the anticipated on-street parking associated with the development.

5.2 Overall, it is considered that the parking survey demonstrates that the parking demand can be comfortably accommodated within the surrounding streets and for this reason it is considered that the proposal is acceptable in highway terms.



Appendix A – Extent of Survey Area

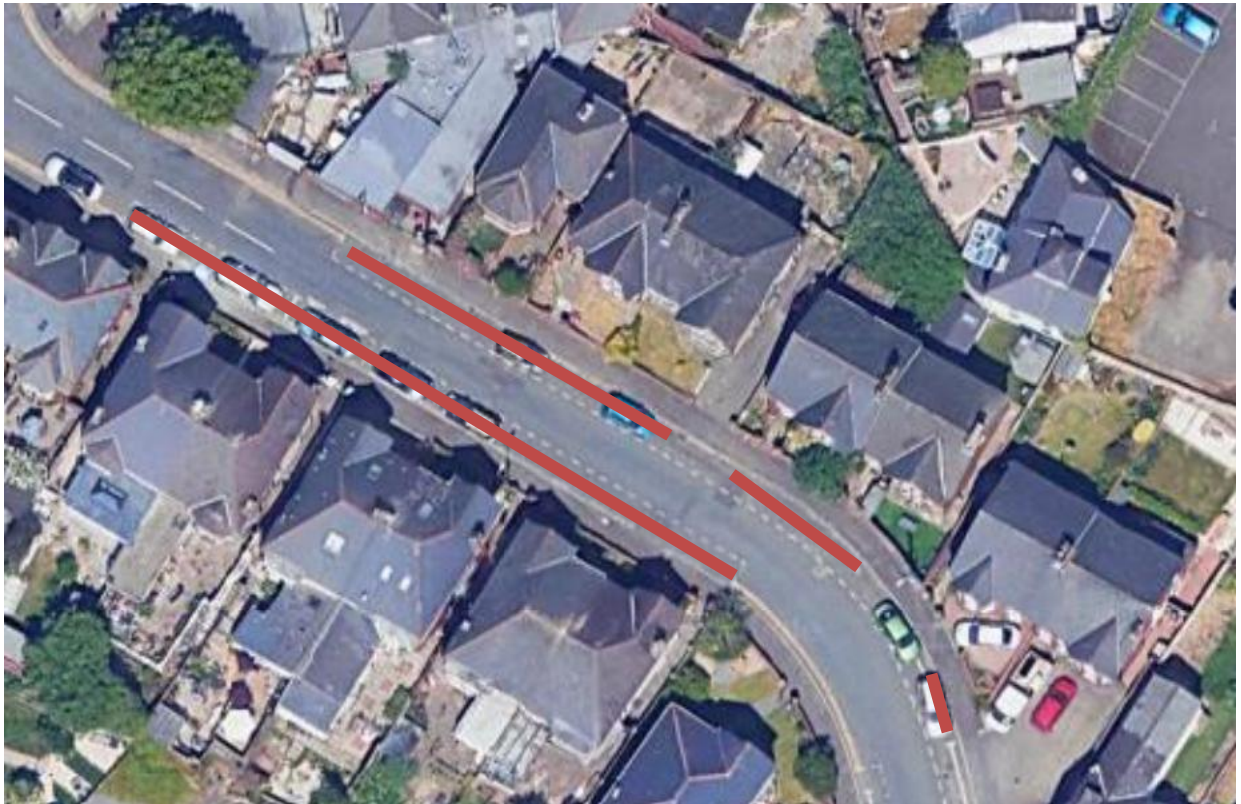








6th May 2026 Photographs

Dewsland Park Road



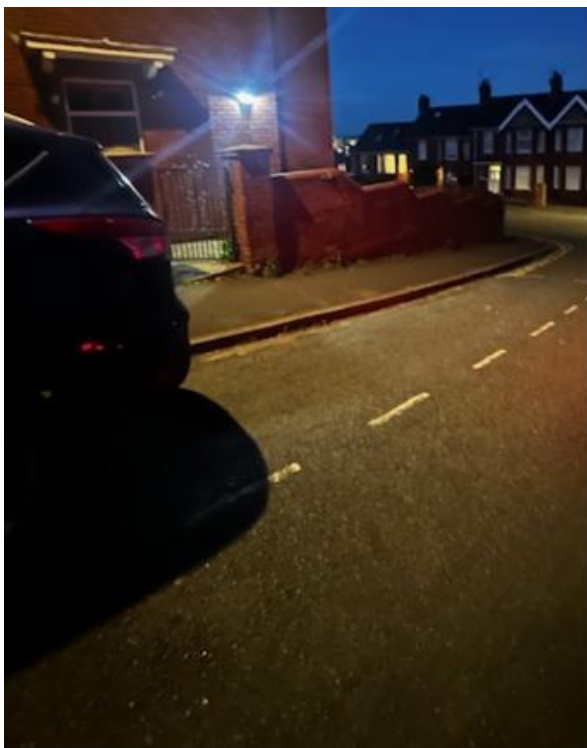





7th May 2026 Photographs

Dewsland Park Road



