


Planting Schedule:

TREES

Number	Plant Name	Height	Girth	Pot Size	Specification
2 -	Acer campestre	350-425cm	12-14cm	45-85L	Heavy Standard: 5 brks: C: Clear Stem min. 200cm
2 -	Liriodendron tulipifera	450-500cm	18-20cm	100-200L	Extra Heavy Standard: C: Clear Stem min. 200cm
1 -	Prunus avium	350-425cm	12-14cm	45-85L	Heavy Standard: 5 brks: C: Clear Stem 175-200cm

Total :5 -

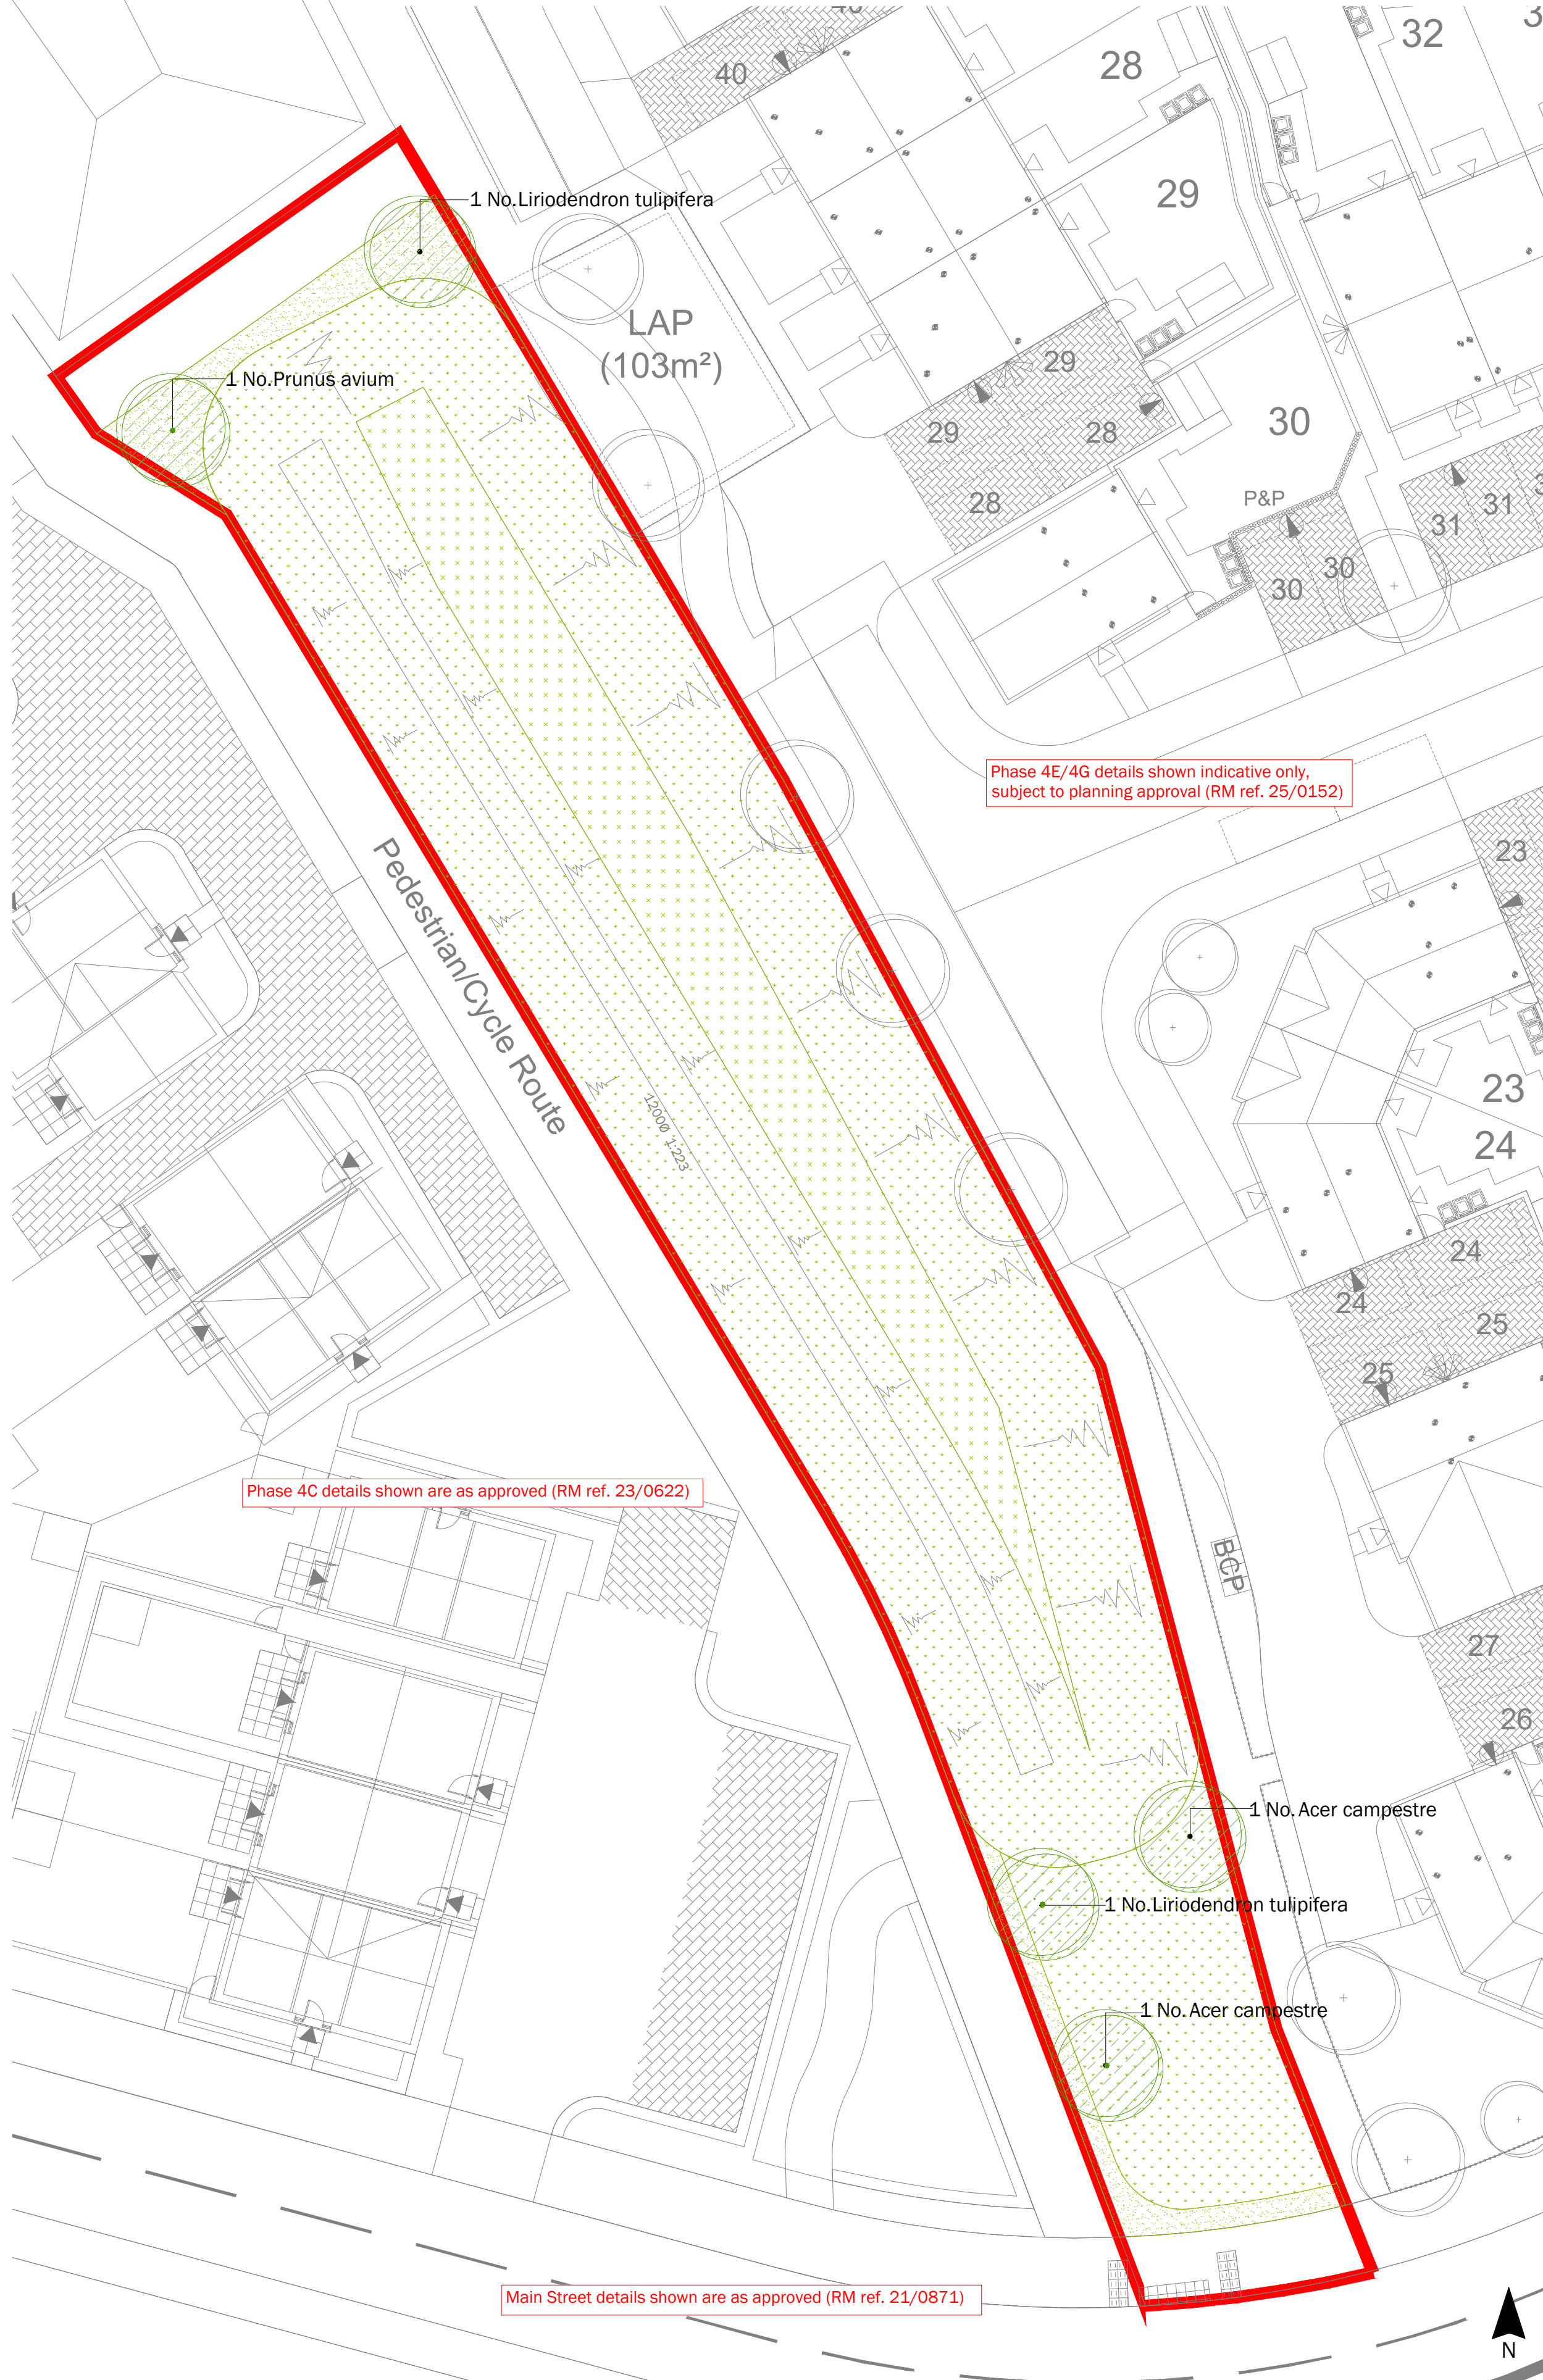

LANDSCAPE SPECIFICATION

SITE PREPARATION

Topsoil
Existing topsoil shall be stripped before building works begin. Imported topsoil shall be to BS3882: 2015 Specification for Topsoil. Topsoil shall be multi-purpose grade, of medium texture, with a high proportion of fertile loamy material. It shall be free from subsoil, rubbish, rubble, contamination, roots of perennial weeds and other materials injurious to plant growth. The maximum stone content of the soil shall be 20%, with the maximum size of stone 25mm in any one dimension. All topsoil shall be stacked in heaps, not exceeding 2m high. During storage, topsoil heaps shall be kept free from compaction, contamination and weeds to BS3882: 2015. Stripped and stored topsoil for reuse on site to be tested to BS3882: 2015 certification, soil to be improved to meet standards prior to reuse if required.

Excavation
Excavation shall NOT be undertaken with machinery within the root protection area of any existing trees or shrubs to be retained. Areas requiring excavation under existing trees are to be hand dug with an arboriculturalist present to oversee the work. Unless otherwise indicated areas to be planted / seeded shall be cleared of all surface rubbish and excavated to the dimensions below finished level as follows, when the soil is not waterlogged or frozen. Ensure the location of all services is known before any excavation operations.

Tree pits: Excavated as per specified details
Shrub and hedge pit / trench: 300mm deep
Grass areas: 300mm deep
Wildflower grassland areas: Excavate to finished levels

The base of excavated areas shall be forked or otherwise cultivated to a depth of 150mm to facilitate drainage and all bricks, stones and other debris, etc. over 75mm in any one dimension shall be removed. Similarly, areas trafficked by construction vehicles shall be ripped to a depth of 150-300mm to relieve compaction.

Backfilling with Subsoil
Where excavated areas are lower than the required depths, excavations shall be backfilled with selected subsoil and lightly consolidated to make up levels. Selected subsoil shall be friable, second quality topsoil or similar and be free of rubbish, roots, stones over 75mm in any one dimension, perennial weeds or other materials injurious to plant growth to BS8601: 2013.

Backfilling with Topsoil
Tree, shrub and hedge pit / trench excavations shall be backfilled, in layers, with clean topsoil (as specified above) thoroughly mixed with planting compost e.g. 'Melcourt Topgrow' compost at a rate of 20 litres/m². An approved tree and shrub fertilizer shall be added to topsoil, prior to backfilling tree-pits. Grass areas (excluding wildflower grassland areas) shall be backfilled with topsoil in layers of 150mm depth.

Cultivation
Prior to cultivation if planting / seeding areas are weed infested, weed growth to be trimmed, the arisings removed and re-growth treated with an approved herbicide ie Glyphosate. Treatment to be undertaken in the growing season preceding planting, at a minimum 4 weeks prior to works to allow for repeat treatment if necessary.

Cultivation shall not be undertaken within the root protection area of any trees / shrubs to be retained, without prior agreement from the Local Planning Authority. Topsoil shall be cultivated by hand or machine prior to planting, with minimal compaction by machine. Cultivate to the following depths and tilth, removing all rubbish, vegetation, perennial weeds, roots, stones over 25mm in any one dimension and rake to even levels.

Grass seeding areas: 150mm deep cultivation to fine tilth raked to a smooth evenly firmed bed
Turf areas: 150mm deep cultivation to medium tilth raked to a smooth evenly firmed bed
Wildflower grassland areas: 150mm deep cultivation to medium tilth raked to a smooth evenly firmed bed

Wildflower grassland areas: Where un-excavated areas are to be seeded with wildflower grassland mix the topsoil shall be cultivated to turn the soil over to a depth of 300mm to bring subsoil to the surface. Elsewhere, excavated areas to be seeded with wildflower grassland mix to be backfilled to finished levels with subsoil (as above).

PLANTING

Tree Planting and Support

Trees planted in landscape areas shall be installed as specified.

All trees to be firmed in after planting. All trees shall have irrigation / aeration system units fitted to fully surround the root ball.

Mulching

Prior to the application of mulch the planting areas shall be completely weed free and watered sufficiently to achieve field capacity. The surface of the planting areas shall be mulched with a minimum 75mm depth layer of 15-65mm nominal particle size, dark, matured woodchip mulch, ensuring that the low branches of trees, shrubs and/or herbaceous plants are NOT smothered.

Mulch shall be an approved product and completely weed and weed seed free. The mulch shall be topped-up to maintain, after settlement, a depth of not less than 50mm. Trees in grass areas shall be planted centrally within a 1m diameter mulch bed, to be mulched to 75mm deep. The surface of mulch to be 10mm below the surface of adjacent lawn / hard surface.

GRASS AREAS

Grass Seeding

Areas of amenity grass shall be seeded with a general amenity grass mix as specified during the period March to May or September to October, during periods of moist, warm weather conditions without significant wind. Pre-seeding fertiliser shall be applied to manufacturer's recommendations. Seed shall be sown on even, prepared ground (as detailed above), at a rate of 35g/m² or as specified, in two transverse operations. Lightly roll seed bed after sowing. Water as necessary to avoid shrinkage and achieve satisfactory establishment. Undertake good horticultural practice to ensure establishment of a healthy grass sward.

Wildflower Grassland Seeding

Areas of wildflower grassland shall be seeded with a wildflower grassland mix suitable for the soil type as specified, during the period March to May or September to October, during periods of suitable warm and moist weather conditions. Seed shall be sown on prepared ground (as detailed above), at a rate of 5g/m² or as specified. Lightly roll seed bed after sowing. Water as necessary to avoid shrinkage and achieve satisfactory establishment. Undertake good horticultural practice to ensure establishment of a healthy wildflower grass sward.

AFTERCARE PERIOD

Regular Visits

During the specified Aftercare Period maintenance visits shall be carried out, at least monthly from April to September and twice during the dormant season to carry out the following operations to establish healthy growing plants / grass in weed free areas: watering, firming-up, removal of litter, pest and disease control, general pruning, checking guards, ties and stakes, weed control, grass cutting and autumn tidying. All arisings shall be carted away and the site shall be left clean and tidy at all times.

Watering

All planting and grass areas shall not be allowed to dry out and shall be kept well watered during the growing season, ensuring the soil is kept moist at all times but avoiding waterlogging.

Replacement Planting


During each August within the Aftercare Period an inspection shall be made and all plants that have died, are missing, damaged or have failed to thrive, shall be noted and replaced in the following planting season.

Grass Cutting

During the first and subsequent growing seasons amenity grass shall be kept at a height of 25mm to 50mm. Any bare patches are to be resown. Selective weed control shall be undertaken as necessary once the sward is sufficiently established.

Wildflower Grassland Cutting

During the first growing season cut wildflower grassland every 2 months to a height of 40-60mm and in subsequent growing seasons cut to 40-60mm height during late March and late August / early September or as specified. All arisings shall be collected and removed from the site to avoid smothering the sward and to reduce nutrient levels. Spot treat perennial weeds with Glyphosate at the manufacturer's recommended dose rate / or hand pull.

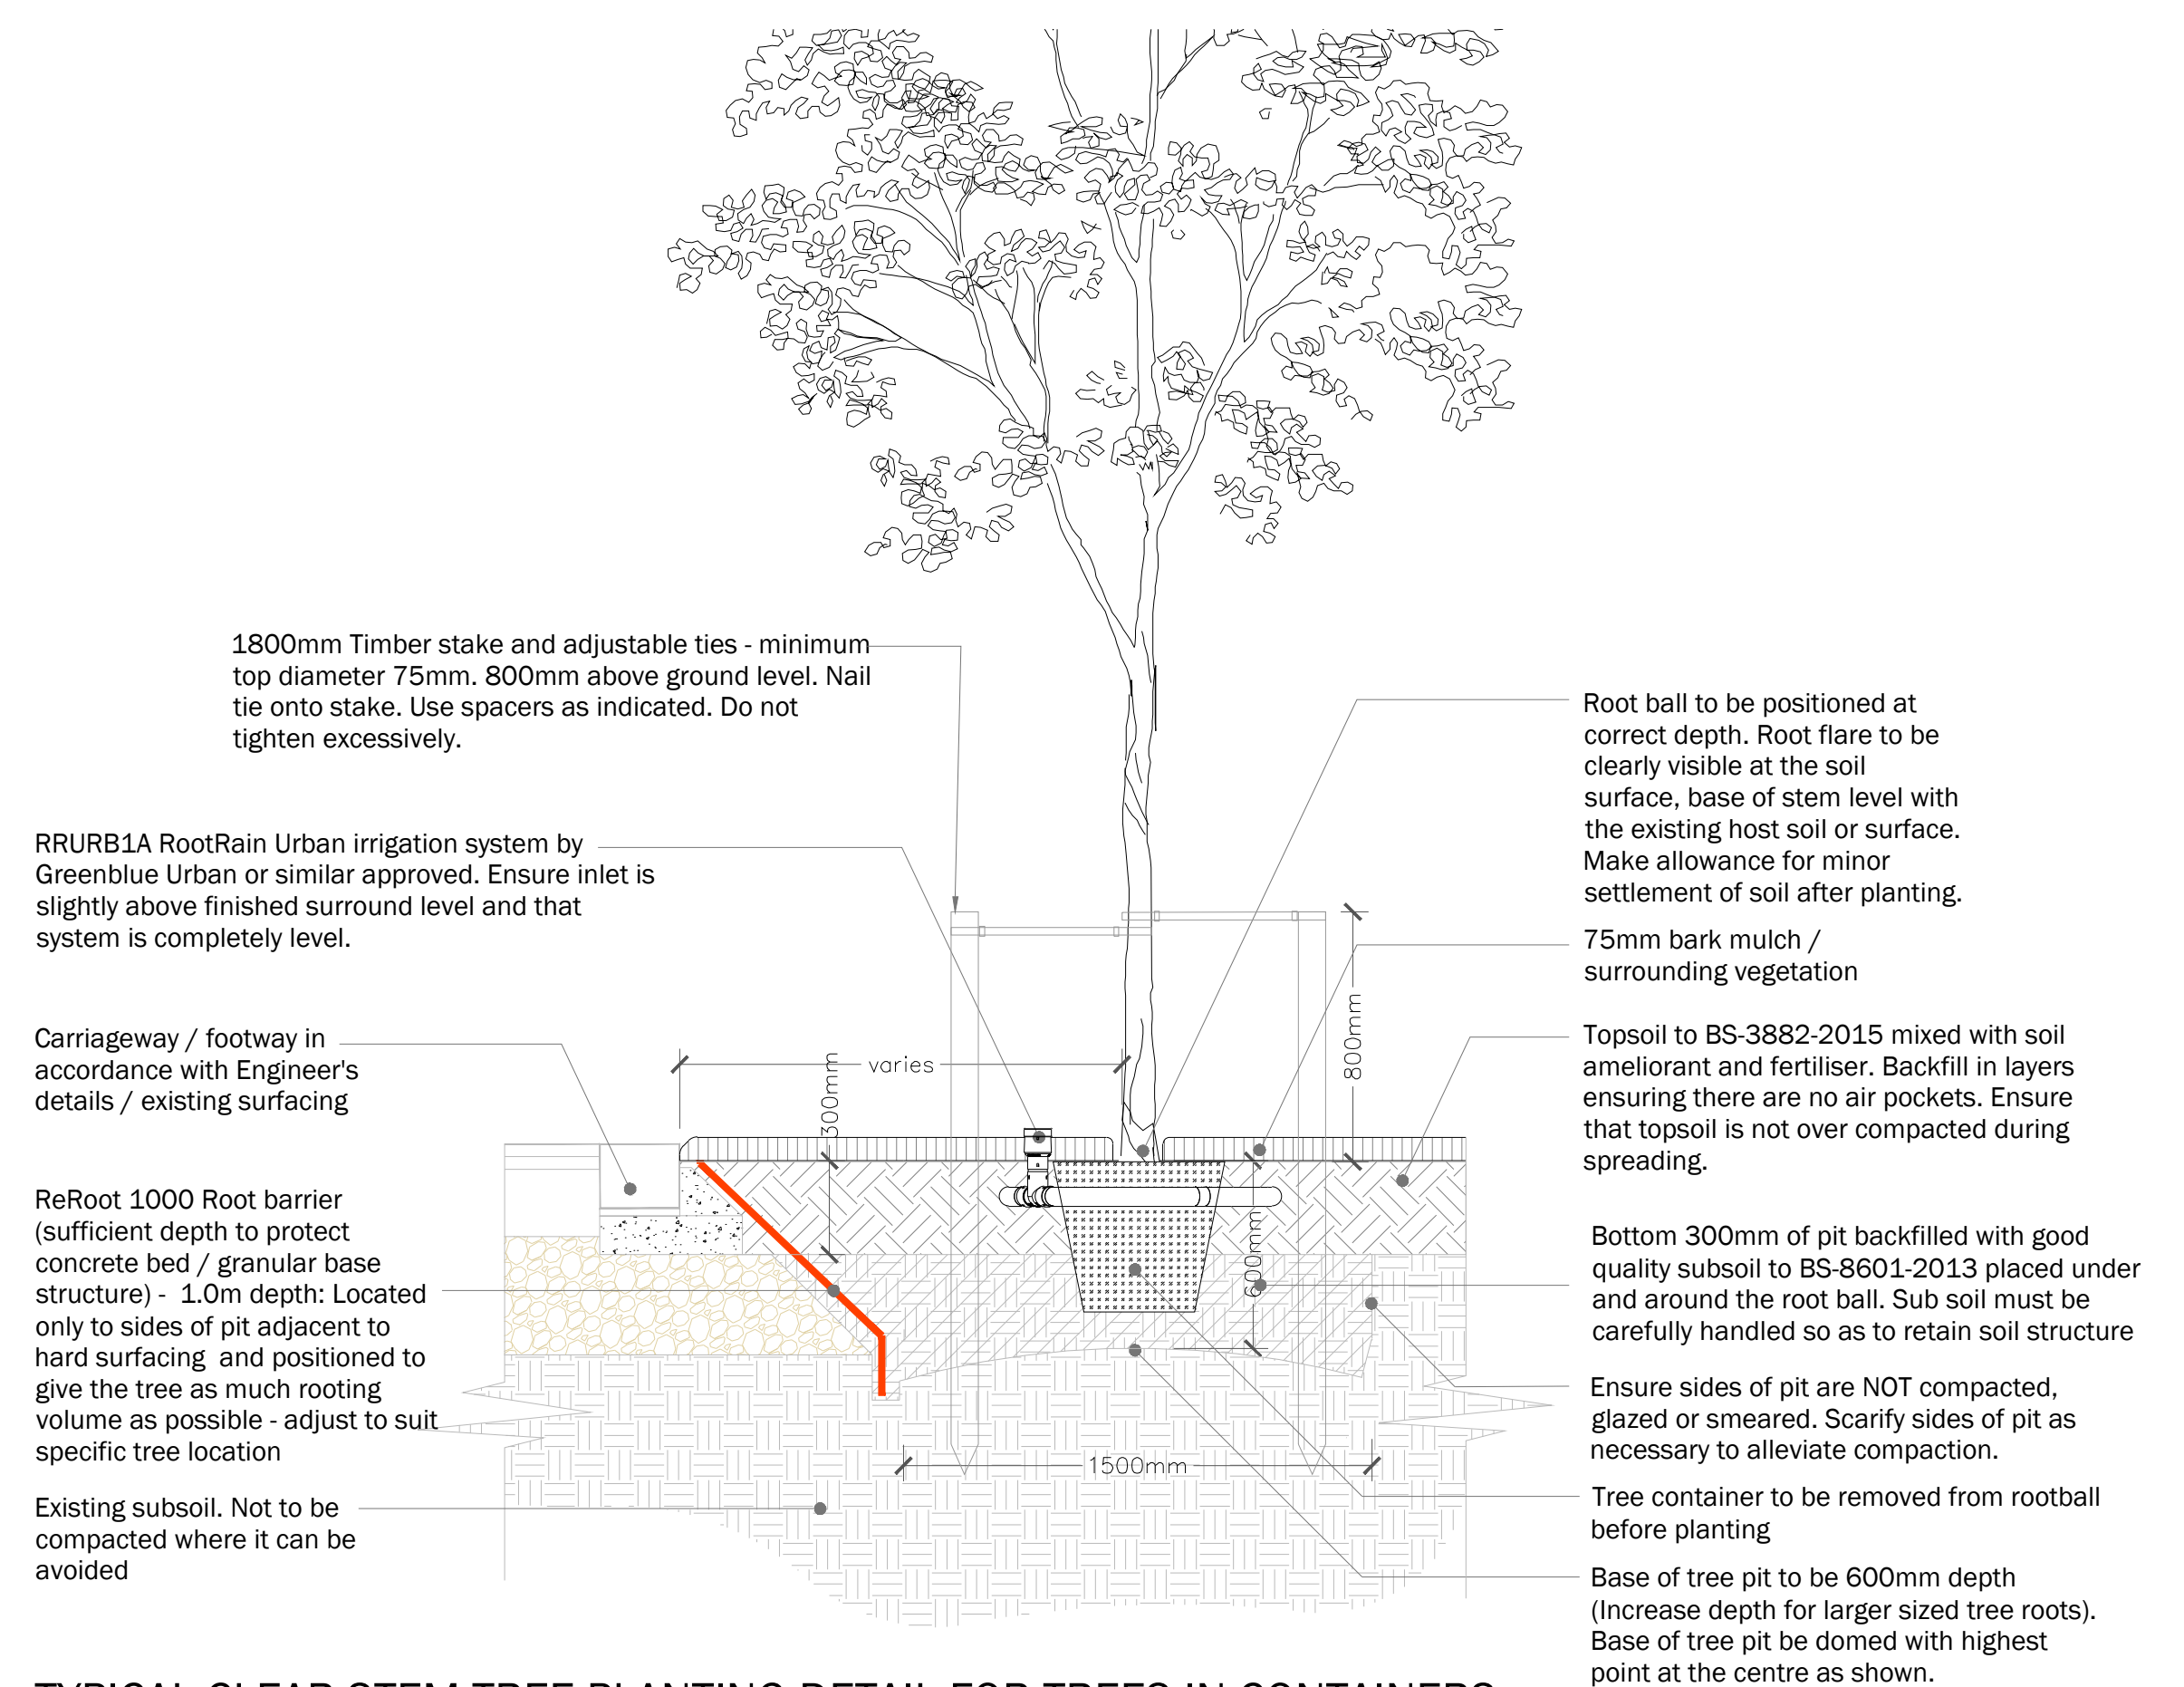

TYPICAL CLEAR STEM TREE PLANTING DETAIL FOR TREES IN CONTAINERS

Double stake fixing in soft landscape adjacent to Carriageway / footway - Not to Scale

Wildflower Meadow Mix:

Emorsgate EM3 Special General Purpose Meadow Mixture

Wildflowers	%	Name
0.5		Achillea millefolium
0.7		Agrimonia eupatoria
1.2		Betonica officinalis
2		Centaurea nigra
1		Daucus carota
0.8		Echium vulgare
0.2		Filipendula ulmaria
0.8		Galium album
0.3		Galium verum
0.4		Geranium pratense
0.1		Lathyrus pratensis
1		Leucanthemum vulgare
0.1		Lotus corniculatus
1		Malva moschata
0.4		Medicago lupulina
0.2		Onobrychis vicifolia
0.2		Pastinaca sativa
1.4		Plantago lanceolata
0.6		Poterium sanguisorba ssp sanguisorba
1		Primula veris
1.5		Prunella vulgaris
1.5		Ranunculus acris
0.2		Ranunculus bulbosus
0.3		Rumex acetosa
0.4		Scabiosa columbaria
0.8		Silene dioica
1		Silene vulgaris
0.2		Taraxacum officinale
0.2		Vicia cracca
20		

Grasses	%	Name
8		Agrostis capillaris
28		Cynosurus cristatus
24		Festuca rubra
4		Phleum bertolonii
16		Poa pratensis
80		

Sowing rates	kg/ha	kg/acre	g/m2
40	16	4	

Emorsgate EM8 Meadow Mixture for Wetlands

Wildflowers	%	Name
0.7		Achillea millefolium
0.6		Achillea eupatoria
0.1		Angelica sylvestris
0.2		Betonica officinalis (Stachys officinalis)
3.2		Centaurea nigra
1.4		Filipendula ulmaria
0.4		Galium album
2		Galium verum
0.8		Lathyrus pratensis
0.6		Leontodon hispidus
1.2		Leucanthemum vulgare
0.6		Lotus corniculatus
0.1		Lotus pendunculatus
1		Medicago lupulina
2		Plantago lanceolata
0.4		Primula veris
0.8		Prunella vulgaris
1.2		Ranunculus acris
0.8		Rhinanthus minor
0.6		Rumex acetosa
0.3		Sanguisorba officinalis
0.5		Silene flos-cuculi (Lychnis flos-cuculi)
0.2		Taraxacum officinale
0.3		Vicia cracca
20		

Grasses	%	Name
4		Agrostis capillaris
4		Anthoxanthum odoratum
0.8		Carex divulsa subsp. divulsa
33.6		Cynosurus cristatus
1.6		Deschampsia cespitosa
20		Festuca rubra
3.2		Hordeum secalinum
5.6		Phleum bertolonii
5.6		Poa trivialis
1.6		Schedonorus arundinaceus
80		

Sowing rates	kg/ha	kg/acre	g/m2
40	16	4	

LEGEND

Soft Landscape

	Proposed trees
	Proposed amenity grass
	Proposed wetland meadow mix; Emorsgate EM8 or similar approved
	Proposed special general wildflower meadow mix; Emorsgate EM3 or similar approved
	Proposed site boundary

Drawing for planning purposes only, do not construct from this drawing

This drawing is to be used for planting information only

Any species substitution must be verified with the project Landscape Architect


This layout must be checked in accordance with NHBC Standards 2023 (Chapter 4.2 - Building Near Trees, and Chapter 10.2 - Drives, Paths and Landscaping) by the project engineer prior to implementation

Excavations: Contractors must ensure they have full information relating to service and drainage positions before undertaking any excavations

Root barriers to be used in association with tree planting adjacent to kerbs, services, highways etc.



Location Plan - Not to Scale



P02	30.05.25	Update to client comments	RF	SV
P01	23.05.25	First issue	KYZ	RF
Rev	Date	Description	Dm	Chk

Title:	Detailed Planting Proposals
Project:	Llanwrn 4C
Client:	St Modwen Homes
Date:	May 2025
Scale:	1:200 @ A1
Drawing No:	1562A9-LA-ZZ-00-DR-L-0501
Revision:	P02
Suitability:	S2
Project No:	1562 A9

T: +44 (0)1279 647044 E: office@lilake.com www.lilake.com

LIZ LAKE ASSOCIATES
LANDSCAPE ARCHITECTS