


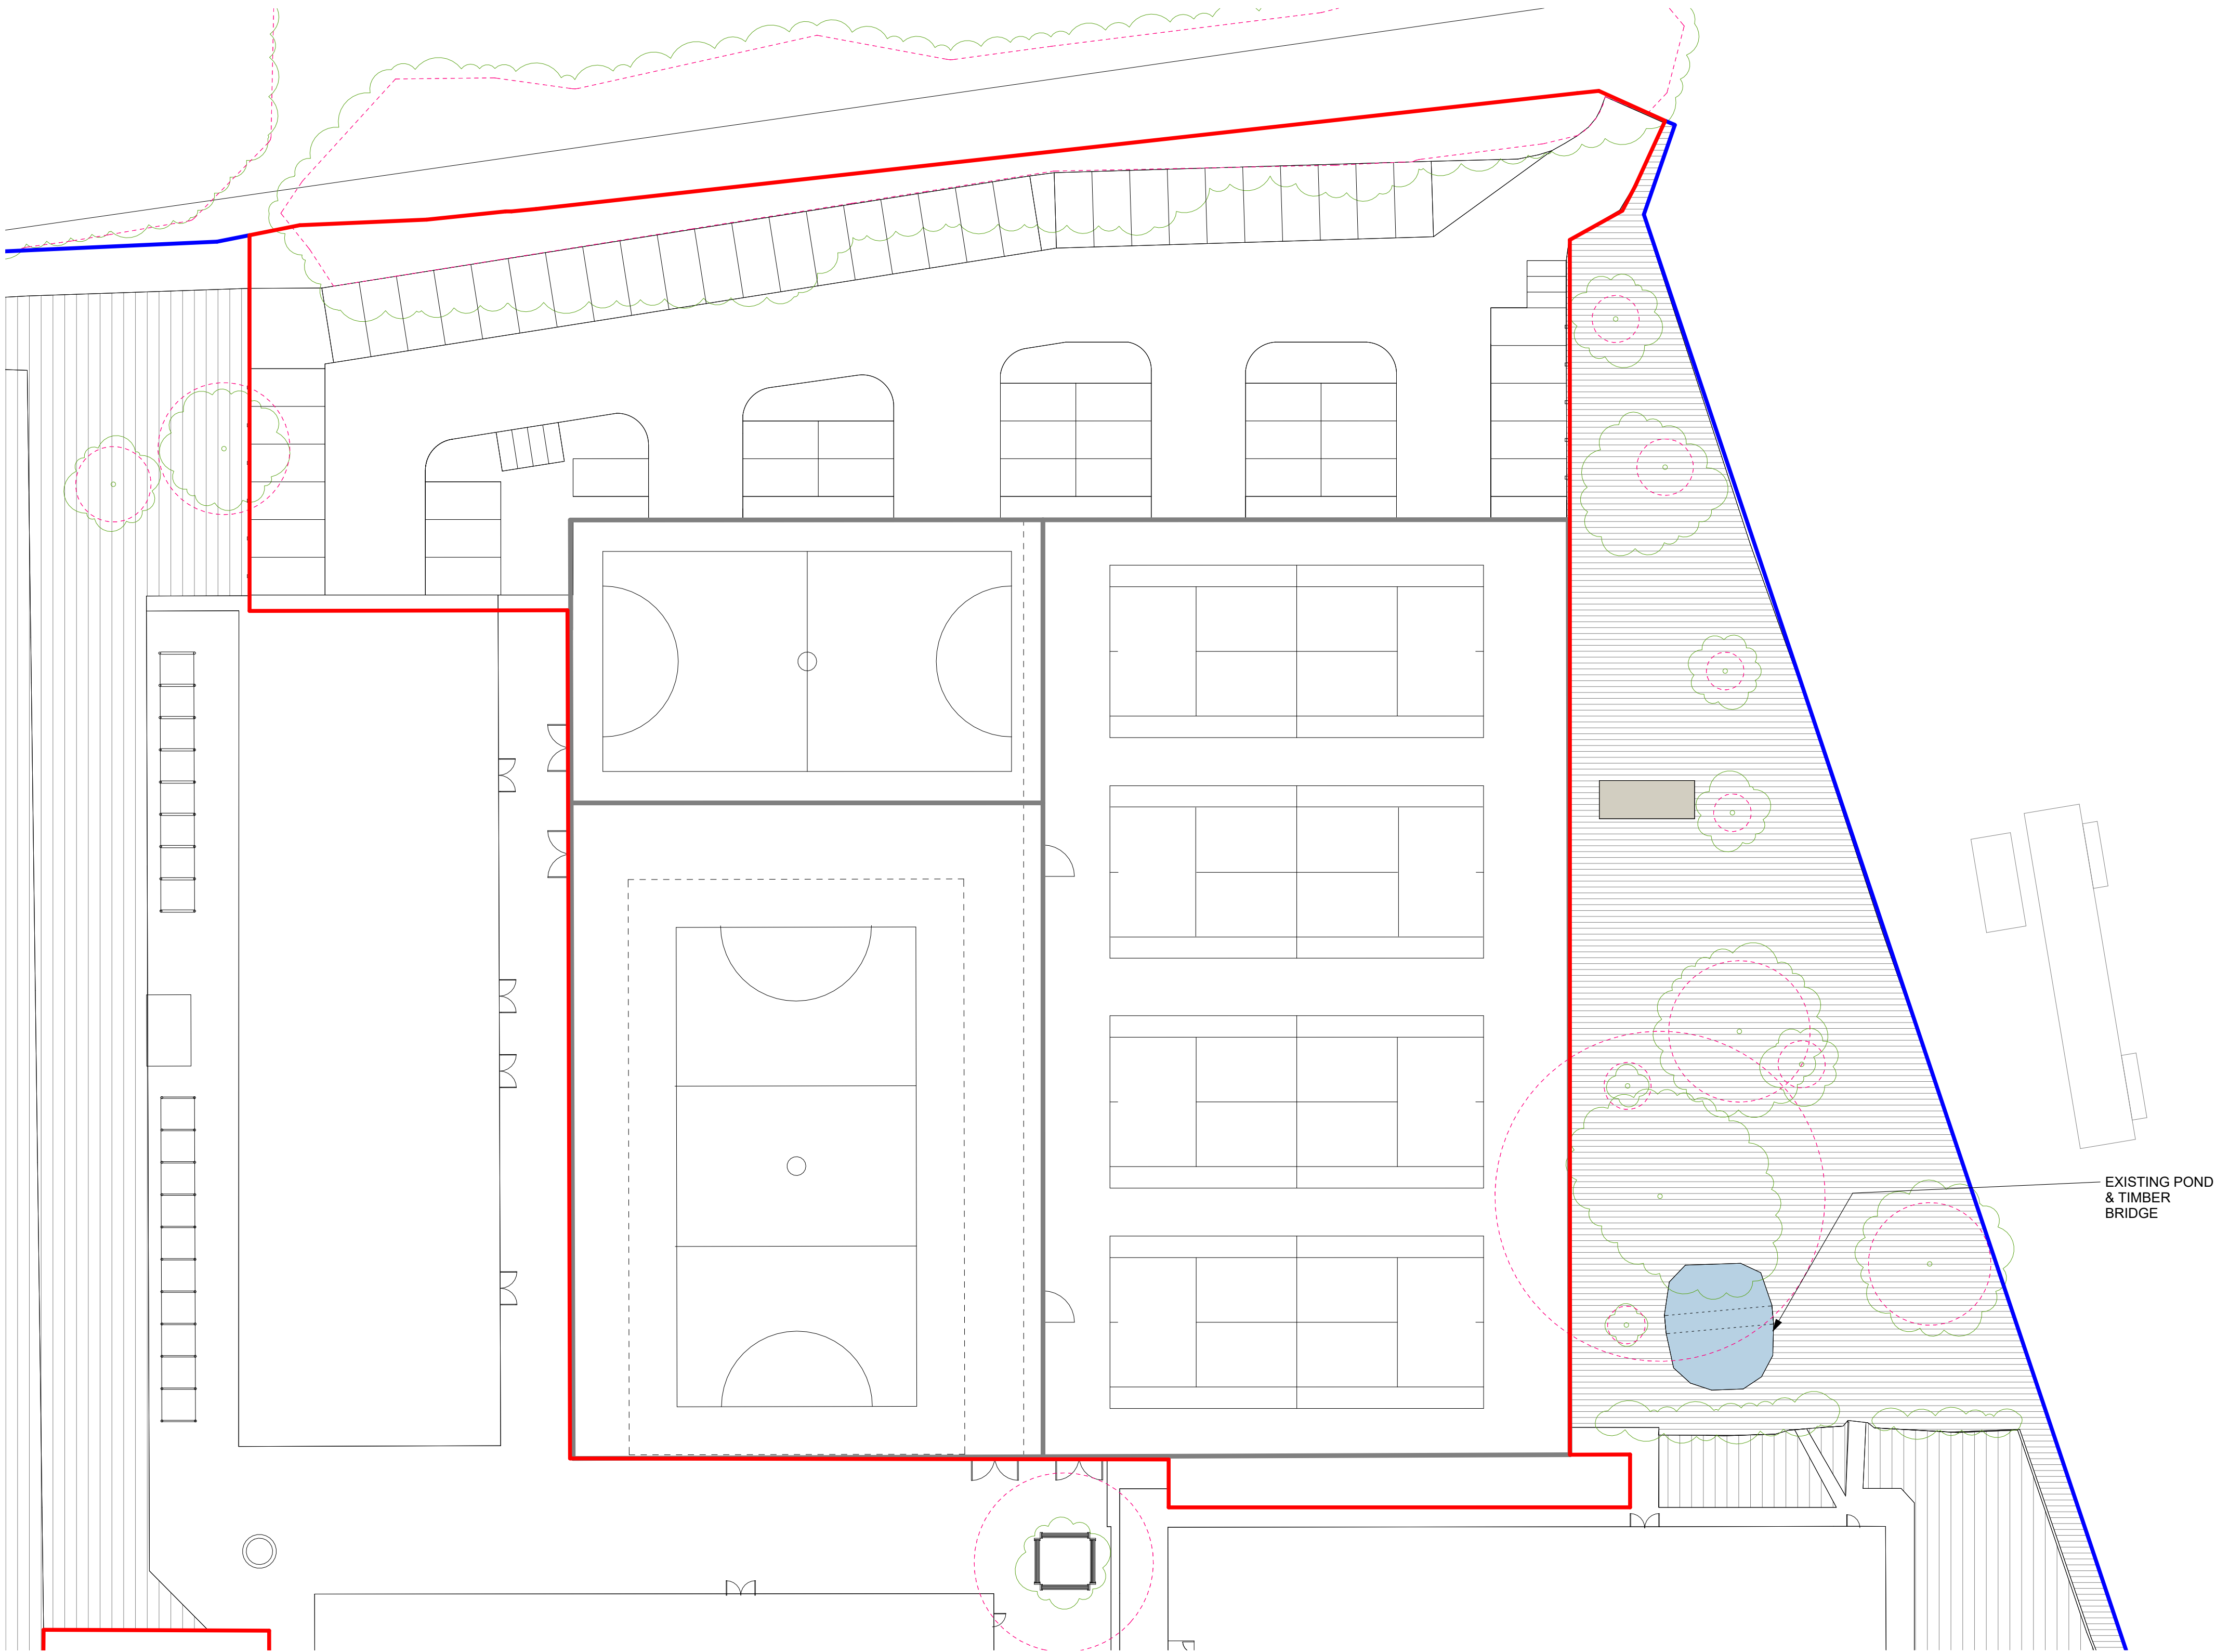

SOFT LANDSCAPE KEY:

- SITE RED LINE BOUNDARY**
- SITE OWNERSHIP BOUNDARY**
- EXISTING TREES**
To be retained and protected.
Refer to 'Arboricultural Report' for details
- EXISTING TREES TO BE REMOVED**
Refer to Arboricultural Report for details
- EXISTING TREE RPA**
Refer to Arboricultural Report for details
- EXISTING GRASS**
To be retained and made good where necessary.
e.g Emorsgate seeds 'EM10 Tussock Mixture' or equal approved.
- EXISTING PLANTING**
To be retained and made good where necessary.
- EXISTING HEDGE PLANTING**
To be retained.
- PROPOSED TREES**
Heavy Standard trees.
Note that exact tree locations may be subject to change slightly due to underground services.
- AMENITY GRASS 757m²**
150mm Topsoil
e.g Germinall Seeds 'A19 All Purpose Landscaping' Or equal approved.
- HEDGE PLANTING**
With 300mm Topsoil & 300mm loosened sub-soil with 75mm depth bark mulch.
- ORNAMENTAL RAIN GARDEN PLANTING**
For detail refer to Soft Landscape Details

Notes

Check all dimensions on site. Do not scale from this drawing
Report any discrepancies and omissions to HLM Architects
This Drawing is Copyright ©

Drawing Notes

- This drawing must be read in conjunction with all relevant HLM Architects' Stage 4 drawings, landscape specification, and information provided by other consultants and disciplines.
- All dimensions, levels, and coordinates must be checked and verified by the contractor prior to construction. Any discrepancies identified during review stages must be reported to HLM Architects.
- Discrepancies between the drawings and existing site conditions should be brought to the attention of HLM Architects for clarification prior to progressing further.
- Design information has been developed in accordance with current British Standards, Building Regulations, and relevant codes of practice.
- Coordination with other disciplines is ongoing. The contractor is responsible for ensuring full integration of all packages during the construction phase.
- Design information provided considers CDM Regulations and statutory health and safety requirements relevant at Stage
- Only the latest revision of this drawing should be used. It is the responsibility of the recipient to ensure they are working from the current information.
- The design complies with the approved fire strategy and accessibility requirements to date. Final compliance will be confirmed during detailed coordination and construction.
- Any changes or proposed substitutions to specified materials must be reviewed and approved by the design team.
- This drawing forms part of the technical design package and is not to be used for construction purposes unless noted otherwise.
- Final proposed ground level information refer to Engineer's drawings.

P01	ISSUE FOR STAGE 4	06/02/2026	EB	KM
Rev	Description	Date	By	Chk
Revisions				Suitability
Project				S4

15-1135-01 Caerleon Comprehensive School

Client

HLM ARCHITECTS

Title

SOFT LANDSCAPE PLAN Sheet 1

Drawing No.	Revision
CCS-HLM-00-00-DR-L-45011	P01

Scale	Drawn
As indicated @A1	EB
Date	Checked
06/02/2026	KM



© HLMArchitects
Suite 104, The Creative Quarter
Morgan Arcade, The Hayes
Cardiff, CF10 1AF

www.hlmarchitects.com
T. +44 (0) 29 2039 6070
cardiff@hlmarchitects.com

