


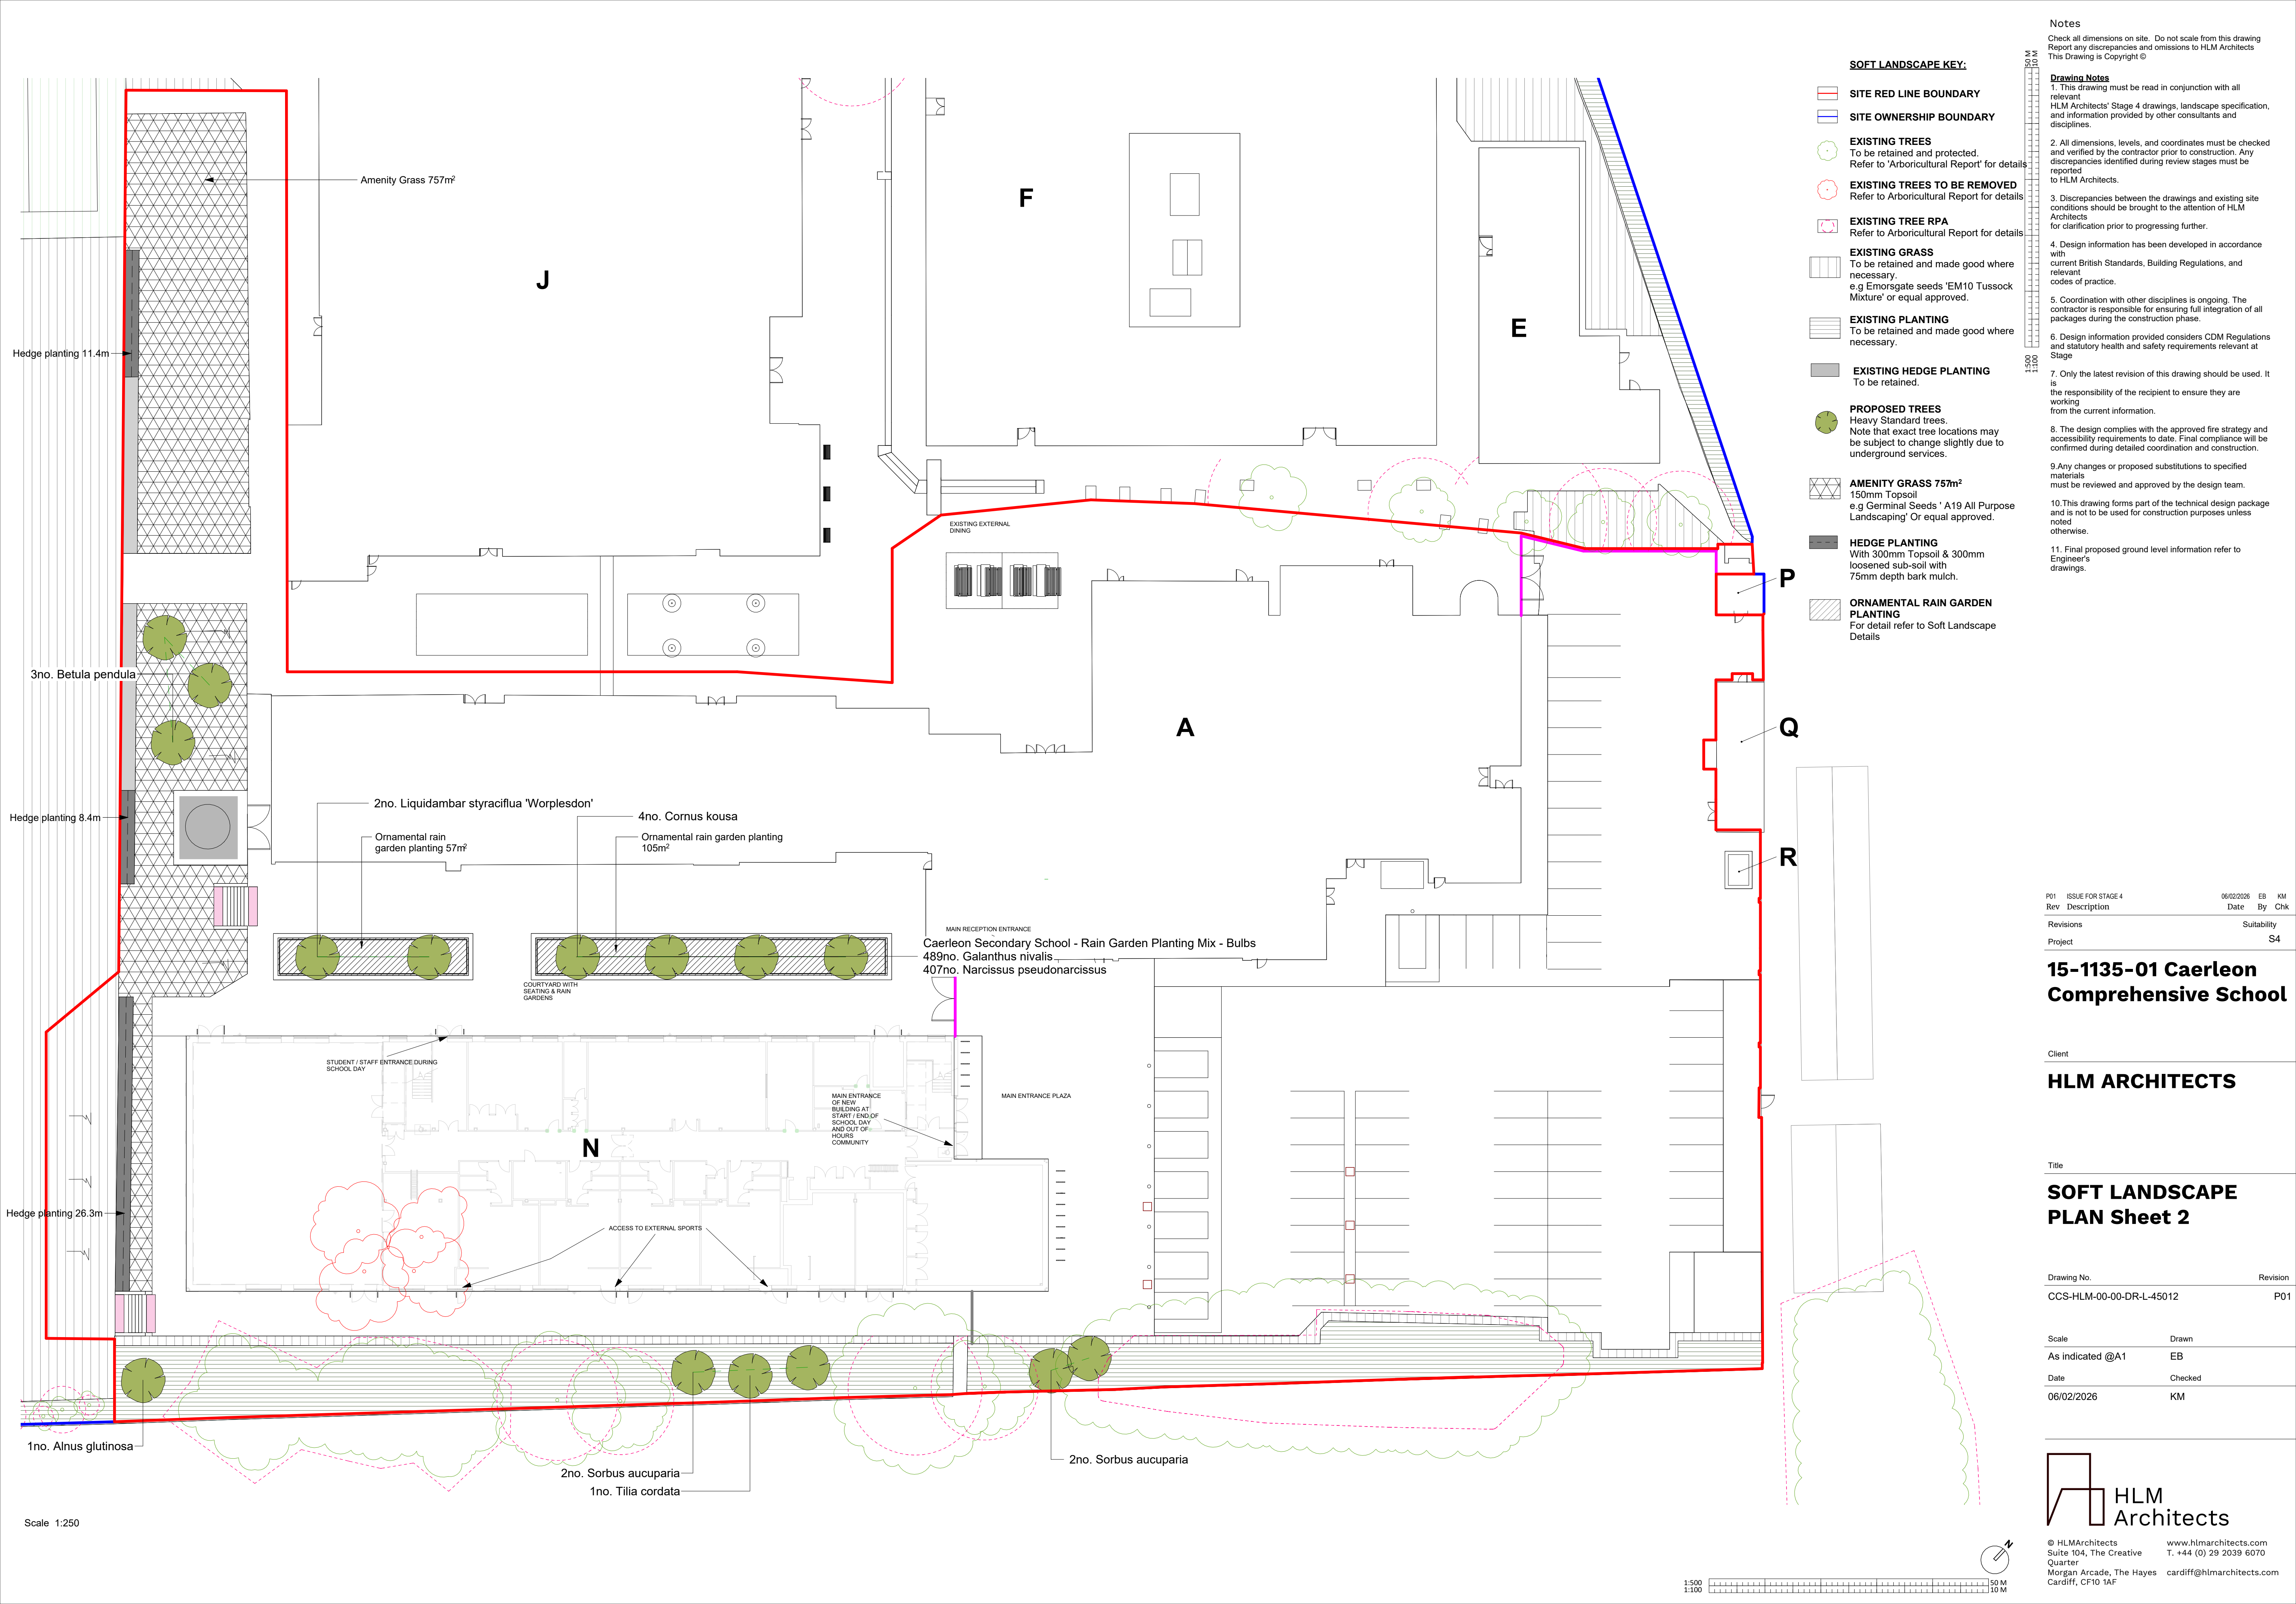

SOFT LANDSCAPE KEY:

- SITE RED LINE BOUNDARY**
- SITE OWNERSHIP BOUNDARY**
- EXISTING TREES**
To be retained and protected.
Refer to 'Arboricultural Report' for details
- EXISTING TREES TO BE REMOVED**
Refer to Arboricultural Report for details
- EXISTING TREE RPA**
Refer to Arboricultural Report for details
- EXISTING GRASS**
To be retained and made good where necessary.
e.g Emorsgate seeds 'EM10 Tussock Mixture' or equal approved.
- EXISTING PLANTING**
To be retained and made good where necessary.
- EXISTING HEDGE PLANTING**
To be retained.
- PROPOSED TREES**
Heavy Standard trees.
Note that exact tree locations may be subject to change slightly due to underground services.
- AMENITY GRASS 757m²**
150mm Topsoil
e.g Germinal Seeds 'A19 All Purpose Landscaping' Or equal approved.
- HEDGE PLANTING**
With 300mm Topsoil & 300mm loosened sub-soil with 75mm depth bark mulch.
- ORNAMENTAL RAIN GARDEN PLANTING**
For detail refer to Soft Landscape Details

- Notes**
- Check all dimensions on site. Do not scale from this drawing
Report any discrepancies and omissions to HLM Architects
This Drawing is Copyright ©
- Drawing Notes**
- This drawing must be read in conjunction with all relevant HLM Architects' Stage 4 drawings, landscape specification, and information provided by other consultants and disciplines.
 - All dimensions, levels, and coordinates must be checked and verified by the contractor prior to construction. Any discrepancies identified during review stages must be reported to HLM Architects.
 - Discrepancies between the drawings and existing site conditions should be brought to the attention of HLM Architects for clarification prior to progressing further.
 - Design information has been developed in accordance with current British Standards, Building Regulations, and relevant codes of practice.
 - Coordination with other disciplines is ongoing. The contractor is responsible for ensuring full integration of all packages during the construction phase.
 - Design information provided considers CDM Regulations and statutory health and safety requirements relevant at Stage
 - Only the latest revision of this drawing should be used. It is the responsibility of the recipient to ensure they are working from the current information.
 - The design complies with the approved fire strategy and accessibility requirements to date. Final compliance will be confirmed during detailed coordination and construction.
 - Any changes or proposed substitutions to specified materials must be reviewed and approved by the design team.
 - This drawing forms part of the technical design package and is not to be used for construction purposes unless noted otherwise.
 - Final proposed ground level information refer to Engineer's drawings.

P01	ISSUE FOR STAGE 4	06/02/2026	EB	KM
Rev	Description	Date	By	Chk
Revisions				Suitability
Project				S4

15-1135-01 Caerleon Comprehensive School

HLM ARCHITECTS

SOFT LANDSCAPE PLAN Sheet 2

Drawing No.	Revision
CCS-HLM-00-00-DR-L-45012	P01

Scale	Drawn
As indicated @A1	EB
Date	Checked
06/02/2026	KM



© HLMArchitects
Suite 104, The Creative Quarter
Morgan Arcade, The Hayes
Cardiff, CF10 1AF

www.hlmarchitects.com
T. +44 (0) 29 2039 6070
cardiff@hlmarchitects.com